


Recessed light

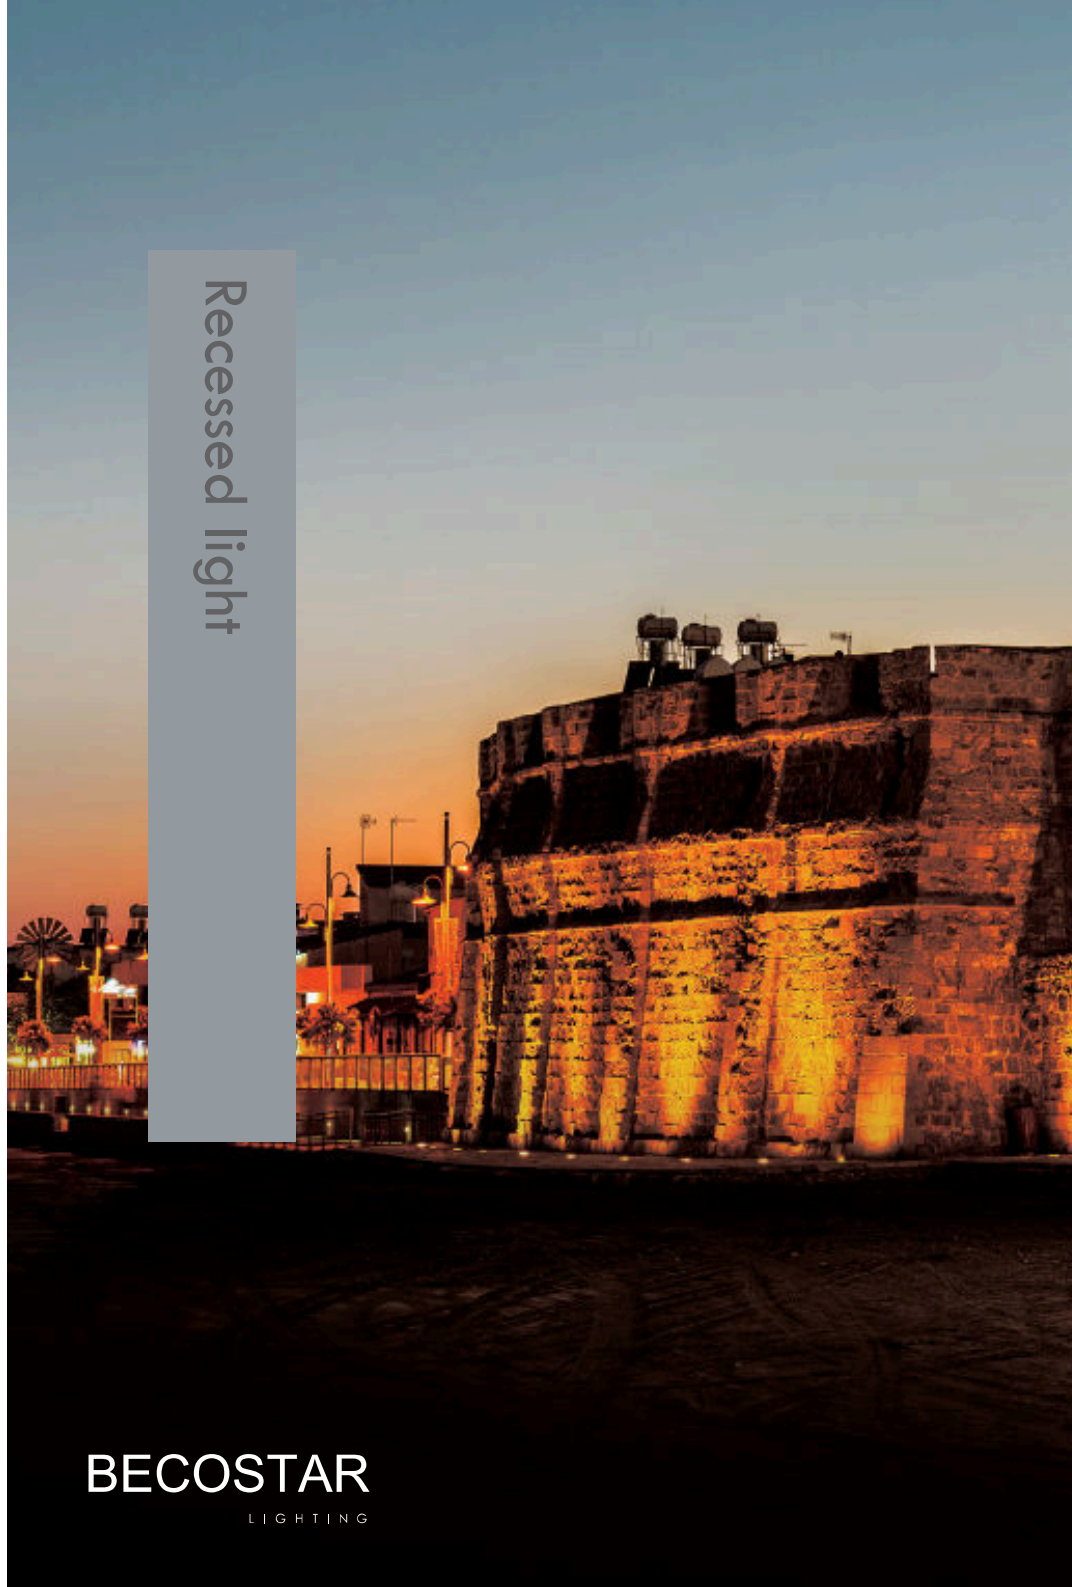


BECOSTAR
LIGHTING

RECESSED
LIGHT


埋地灯

LIGHTING ARTISAN


RECESSED LIGHT 埋地灯



BE-WUL0111A



BE-WUL0111B



BE-WUL0111C

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0111A	1W	350mA	3000K	120lm	25°	D30	35
BE-WUL0111B	1W	350mA	3000K	120lm	25°	D30	35
BE-WUL0111C	1W	350mA	3000K	120lm	25°	D30	35

Features 产品特点

Stainless Steel Walkover Up Light

For outdoor inground/recessed/path/decking/bathtub

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 25° / 40° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Satin 316 Stainless Steel

IP rated: IP67

Cut out: D30 (for deck mounting)

Input Current: 350mA, 3-4V DC with 2M of power cable

Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

不锈钢埋地灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：25° / 40° / 60°

色温：2700K / 3000K / 4000K

颜色：不锈钢316

防护等级：IP67

开孔尺寸：D30 (嵌入安装)


输入电流：350mA, 3-4V DC; 自带配线长度2米

调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

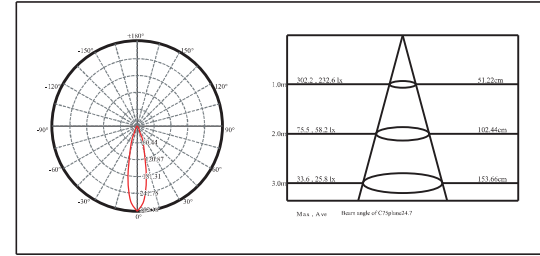


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS04
Cut out size: D33mm
开孔尺寸: D33mm



Unit: mm

IP68 cable connector 防水接线器



WCC001
suitable for 22-12AWG cable
适用于22-12AWG电线

Optional finish 可选颜色



MB
Matt Black
氧化雾黑



MS
Matt Silver
氧化雾银

RECESSED LIGHT 埋地灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0112A	1W	12/24V	3000K	120lm	25°	D30	60
BE-WUL0112B	1W	12/24V	3000K	120lm	25°	D30	60
BE-WUL0112C	1W	12/24V	3000K	120lm	25°	D30	60

Unit: mm

Features 产品特点

Stainless Steel Walkover Up Light
For outdoor inground/recessed/path/decking/bathtub

LED: 1W
Reduced Glare: Sunken light source
Beam Angle: 25° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D30 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢埋地灯
适用于户外：走道、庭院、花园区域


LED: 1W
光束角：25° / 40° / 60°
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D30 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

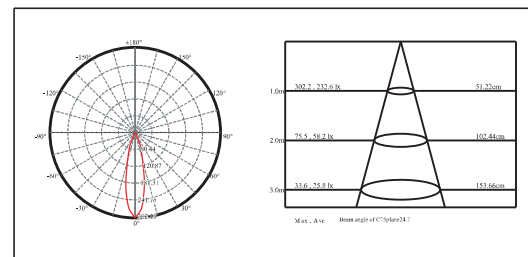


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS05
Cut out size: D33mm
开孔尺寸: D33mm



IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0113A



BE-WUL0113B



BE-WUL0113C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0113A	0.5W	24VDC	3000K	75lm	D30	35
BE-WUL0113B	0.5W	24VDC	3000K	75lm	D30	35
BE-WUL0113C	0.5W	24VDC	3000K	75lm	D30	35

Features 产品特点

Stainless Steel Walkover Up Light

For outdoor inground/recessed/path/decking/bathtub

LED: 1W

Reduced Glare: Sunken light source

Color Temperature: 2700K / 3000K / 4000K

Finish: Satin 316 Stainless Steel

IP rated: IP67

Cut out: D30 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢埋地灯

适用于户外：走道、庭院、花园区域

LED: 1W

色温：2200K / 2700K / 3000K

颜色：不锈钢316

防护等级：IP67


开孔尺寸：D30 (嵌入安装)

输入电压：24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

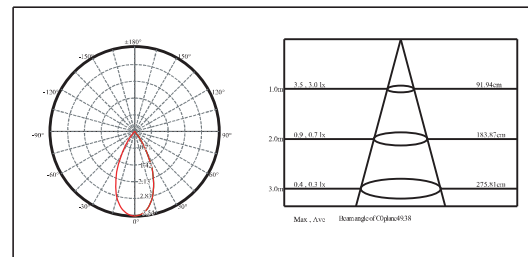


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS04
Cut out size: D33mm
开孔尺寸: D33mm



IP68 cable connector 防水接线器



WCC001
suitable for 22-12AWG cable
适用于22-12AWG电线

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0311A



BE-WUL0311B



BE-WUL0311C

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0311A	3W	700mA	3000K	250lm	21°	D40	55
BE-WUL0311B	3W	700mA	3000K	250lm	21°	D40	55
BE-WUL0311C	3W	700mA	3000K	250lm	21°	D40	55

Features 产品特点

Stainless Steel Walkover Up Light

For outdoor inground/recessed/path/decking/bathtub

LED: 3W
Reduced Glare: Sunken light source
Beam Angle: 10° / 15° / 21° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D40 (for deck mounting)

Input Current: 350mA/500mA/700mA, 3-4V DC with 2M of power cable
Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

不锈钢埋地灯


适用于户外：走道、庭院、花园区域

LED: 3W
光束角：10° / 15° / 21° / 36° / 60°
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D40 (嵌入安装)

输入电流：350mA/500mA/700mA, 3-4V DC; 自带配线长度2米
调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

Optical Specification 配光曲线

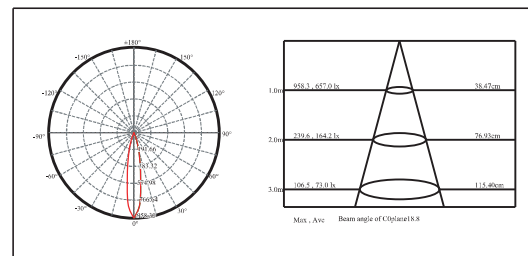


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



IP68 junction box 防水接线盒



JB1001
For single fixture installation
单灯安装



WCC001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0312A



BE-WUL0312B



BE-WUL0312C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0312A	2W	12/24V	3000K	200lm	21°	D40	65
BE-WUL0312B	2W	12/24V	3000K	200lm	21°	D40	65
BE-WUL0312C	2W	12/24V	3000K	200lm	21°	D40	65

Features 产品特点

Stainless Steel Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 2W
Reduced Glare: Sunken light source
Beam Angle: 10° / 15° / 21° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢埋地灯
适用于户外：走道、庭院、花园区域


LED: 2W
光束角：10° / 15° / 21° / 36° / 60°
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D40 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

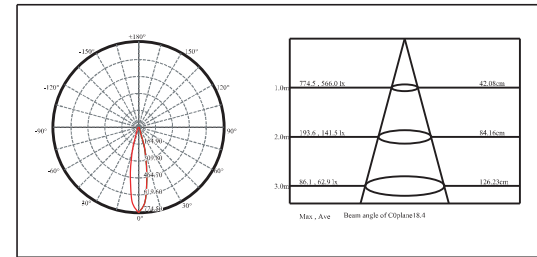


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0412A



BE-WUL0412B



BE-WUL0412C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0412A	4W	12/24V	3000K	350lm	10°	D52	100
BE-WUL0412B	4W	12/24V	3000K	350lm	10°	D52	100
BE-WUL0412C	4W	12/24V	3000K	350lm	10°	D52	100

Features 产品特点

Stainless Steel Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 4W
Reduced Glare: Sunken light source
Beam Angle: 3° / 6° / 10° / 20° / 40°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D52 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢制埋地灯
适用于户外：走道、庭院、花园区域


LED: 4W
光束角：3° / 6° / 10° / 20° / 40°
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D52 (嵌入安装)

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

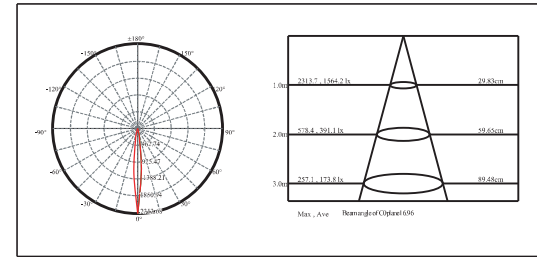


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色



MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0512A



BE-WUL0512B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0512A	5W	24V	3000K	550lm	36°	D65	120
BE-WUL0512B	5W	24V	3000K	550lm	Asymmetric 偏光	D65	120

Features 产品特点

Stainless Steel Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 5W
Reduced Glare: Sunken light source
Beam Angle: WUL0512A (15° / 24° / 36°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D65 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢埋地灯
适用于户外：走道、庭院、花园区域


LED: 5W
光束角：WUL0512A(15° / 24° / 36°)
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D65 (嵌入安装)

输入电压：24V DC；内置DC-DC驱动，自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

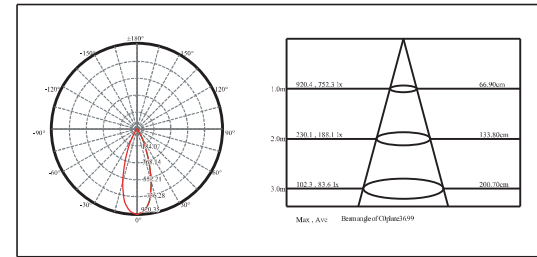


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0711A



BE-WUL0711B



BE-WUL0711C

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0711A	7W	350mA	3000K	750lm	38°	D65	85
BE-WUL0711B	7W	350mA	3000K	750lm	38°	D65	85
BE-WUL0711C	7W	350mA	3000K	750lm	38°	D65	85

Features 产品特点

Stainless Steel Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 7W
Reduced Glare: Sunken light source
Beam Angle: 15° / 25° / 38° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D65 (for deck mounting)

Input Current: 350mA, 18V DC with 2M of power cable
Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

不锈钢埋地灯
适用于户外：走道、庭院、花园区域


LED: 7W
光束角：15° / 25° / 38° / 60°
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D65 (嵌入安装)

输入电流：350mA, 18V DC; 自带配线长度2米
调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

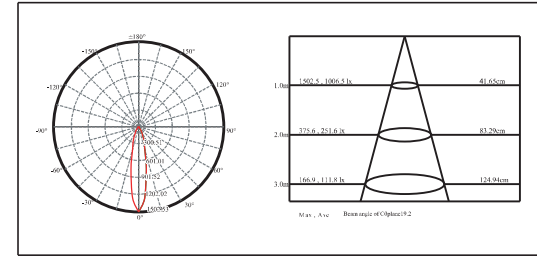


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm

IP68 junction box 防水接线盒



JB1001
For single fixture installation
单灯安装



WCC001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0712A



BE-WUL0712B



BE-WUL0712C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0712A	7W	24V	3000K	750lm	38°	D65	110
BE-WUL0712B	7W	24V	3000K	750lm	38°	D65	110
BE-WUL0712C	7W	24V	3000K	750lm	38°	D65	110

Features 产品特点

Stainless Steel Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 7W
Reduced Glare: Sunken light source
Beam Angle: 15° / 25° / 38° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D65 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢埋地灯
适用于户外：广场、走道、庭院、花园区域

LED: 7W
光束角：15° / 25° / 38° / 60°
色温：2700K / 3000K / 4000K
颜色：不锈钢316
防护等级：IP67
开孔尺寸：D65 (嵌入安装)

输入电压：24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

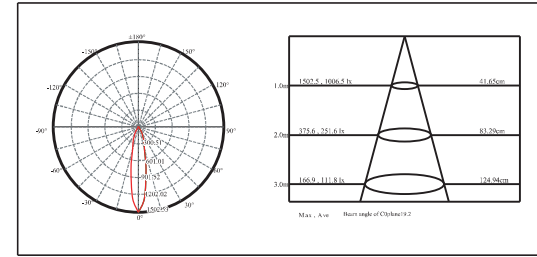


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色



MB
Matt Black
氧化雾黑




MS
Matt Silver
氧化雾银


RECESSED LIGHT 埋地灯



BE-WUL0101A



BE-WUL0101B



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0101A	1W	12/24V	3000K	120lm	21°	D40	60
BE-WUL0101B	1W	12/24V	3000K	120lm	21°	D40	60

Features 产品特点

Aluminium Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 1W
Reduced Glare: Sunken light source
Beam Angle: 10° / 15° / 21° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制埋地灯
适用于户外：走道、庭院、花园区域

LED: 1W
光束角：10° / 15° / 21° / 36° / 60°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
开孔尺寸：D40 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

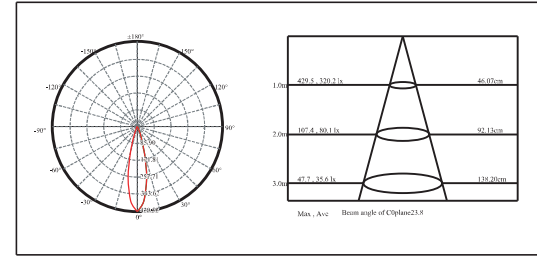


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



Anti-glare glass lens 光学配件




WUAG06L
Linear glass lens
横纹玻璃



WUAG06S
Soften glass lens
布纹玻璃



WUAH03
Honeycomb louver
蜂巢网片



IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑



SS
Stainless Steel
不锈钢色

RECESSED LIGHT 埋地灯

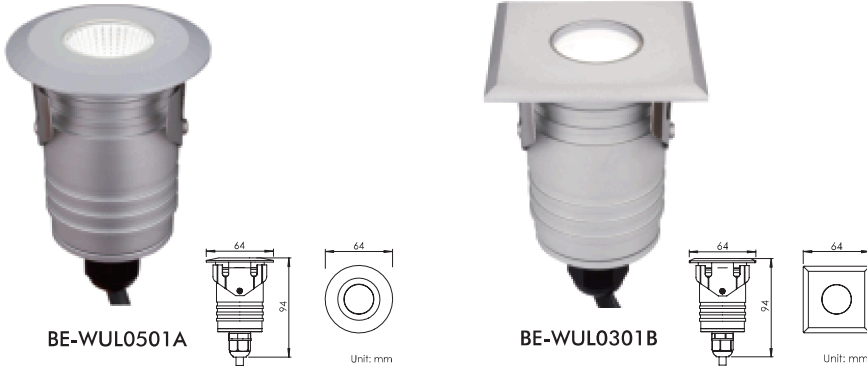

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0501A	5W	12/24V	3000K	550lm	40°	D51	100
BE-WUL0501B	5W	12/24V	3000K	550lm	40°	D51	100
BE-WUL0301A	3W	12/24V	3000K	250lm	20°	D51	100
BE-WUL0301B	3W	12/24V	3000K	250lm	20°	D51	100

Features 产品特点

Aluminium Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 5W / 3W
Beam Angle: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制埋地灯
适用于户外：广场、走道、庭院、花园区域

LED: 5W / 3W
光束角：5W (24° / 40° / 60°); 3W (20° / 40° / 60°)
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米
(注：因5W内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)


3年有限整灯品质保证

Optical Specification 配光曲线

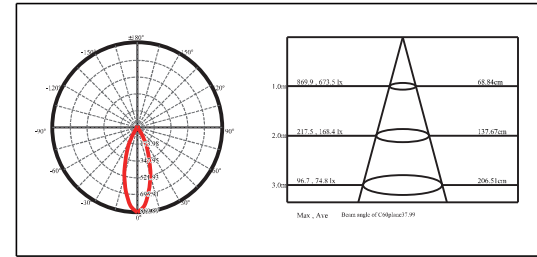

Optical Accessories 可选配件


Mounting sleeve 预埋件

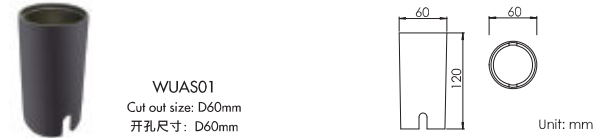

Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

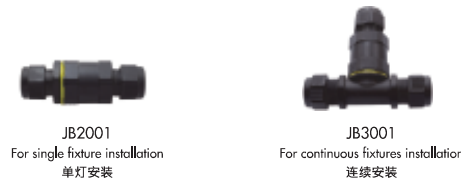


Optional finish 可选颜色



RECESSED LIGHT 埋地灯




BE-WUL0901A



Unit: mm



BE-WUL0801B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0901A	9W	12/24V	3000K	1050lm	38°	D65	115
BE-WUL0901B	9W	12/24V	3000K	1050lm	38°	D65	115
BE-WUL0801A	8W	12/24V	3000K	750lm	25°	D65	115
BE-WUL0801B	8W	12/24V	3000K	750lm	25°	D65	115

Features 产品特点

Aluminium Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 9W / 8W
Beam Angle: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制埋地灯
适用于户外: 走道、庭院、花园区域

LED: 9W / 8W
光束角: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)
色温: 2700K / 3000K / 4000K
颜色: 氧化雾银
防护等级: IP67
开孔尺寸: D65 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米
(注: 因9W内置驱动启动电流要求较高, 请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Optical Specification 配光曲线

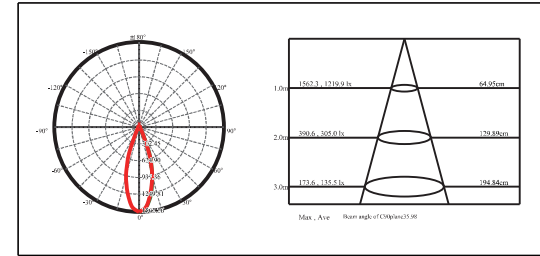


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm


Anti-glare glass lens 光学配件



WUAG02F
Frosted glass lens
磨砂玻璃



WUAG02W
Silk-screen glass lens
丝网玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑




SS
Stainless Steel
不锈钢色

RECESSED LIGHT 埋地灯



BE-DUL0501A



BE-DUL0301B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-DUL0501A	5W	12/24V	3000K	550lm	40°	D57	105
BE-DUL0501B	5W	12/24V	3000K	550lm	40°	D57	105
BE-DUL0301A	3W	12/24V	3000K	250lm	20°	D57	105
BE-DUL0301B	3W	12/24V	3000K	250lm	20°	D57	105

Features 产品特点

Stainless Steel Driveover Up Light
For outdoor inground / recessed / path / decking

LED: 5W / 3W
Beam Angle: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D57 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢埋地灯
适用于户外: 走道、庭院、花园区域

LED: 5W / 3W
光束角: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP67
开孔尺寸: D57 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米
(注: 因5W内置驱动启动电流要求较高, 请保证电源功率高于灯具功率4倍)

3年有限盏灯品质保证

Optical Specification 配光曲线

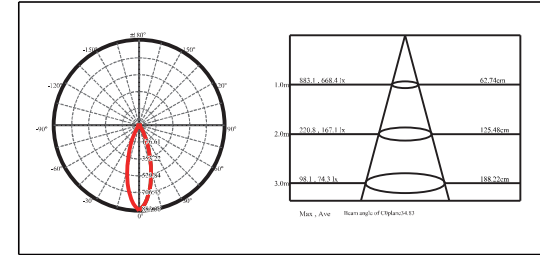


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm



Unit: mm


Anti-glare glass lens 光学配件



DUAG01F
Frosted glass lens
喷砂玻璃



DUAG01W
Silk-screen glass lens
丝印玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装

RECESSED LIGHT 埋地灯




BE-DUL0901A



Unit: mm



BE-DUL0801B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-DUL0901A	9W	12/24V	3000K	1050lm	38°	D70	120
BE-DUL0901B	9W	12/24V	3000K	1050lm	38°	D70	120
BE-DUL0801A	8W	12/24V	3000K	750lm	25°	D70	120
BE-DUL0801B	8W	12/24V	3000K	750lm	25°	D70	120

Features 产品特点

Stainless Steel Driveover Up Light
For outdoor inground / recessed / path / decking

LED: 9W / 8W
Beam Angle: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP67
Cut out: D70 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢埋地灯
适用于户外: 走道、庭院、花园区域

LED: 9W / 8W
光束角: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP67
开孔尺寸: D70 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米
(注: 因9W内置驱动启动电流要求较高, 请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Optical Specification 配光曲线

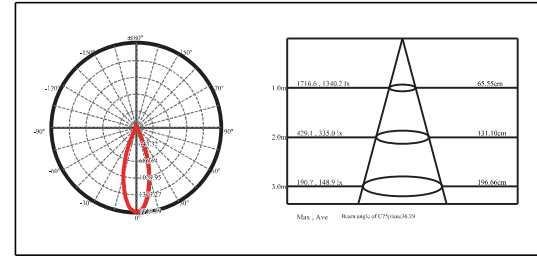


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm


Anti-glare glass lens 光学配件



DUAG02F
Frosted glass lens
喷砂玻璃



DUAG02W
Silk-screen glass lens
丝印玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装


RECESSED LIGHT 埋地灯



BE-WUL0502A



BE-WUL0502B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0502A	5W	12/24V	3000K	550lm	40°	D51	105
BE-WUL0502B	5W	12/24V	3000K	550lm	40°	D51	105

Features 产品特点

Aluminium Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 5W
Reduced Glare: Sunken light source
Beam Angle: 24° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
(Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制埋地灯
适用于户外：走道、庭院、花园区域

LED: 5W
光束角：24° / 40° / 60°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

Optical Specification 配光曲线

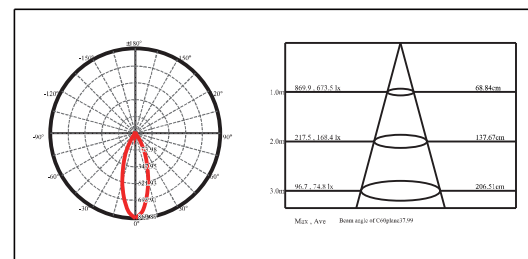


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm



Unit: mm

Anti-glare glass lens 光学配件




WUAG04L
Linear glass lens
横纹玻璃



WUAG04S
Soft glass lens
布纹玻璃



WUAH01
Honeycomb louver
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑



SS
Stainless Steel
不锈钢色

RECESSED LIGHT 埋地灯

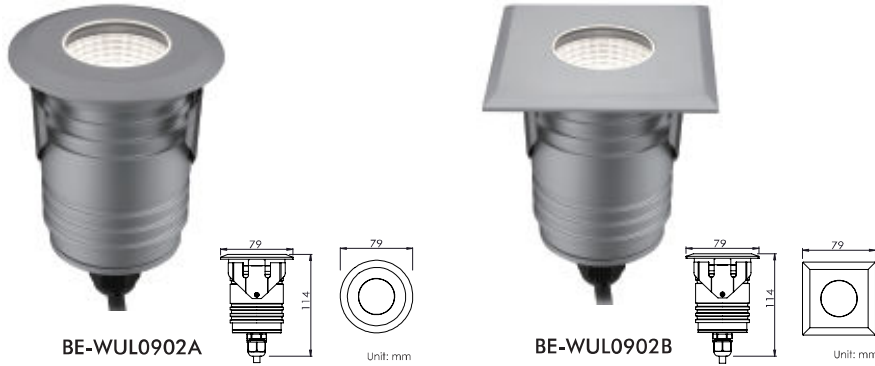

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0902A	9W	12/24V	3000K	1050lm	38°	D65	120
BE-WUL0902B	9W	12/24V	3000K	1050lm	38°	D65	120

Features 产品特点

Aluminium Walkover Up Light
For outdoor inground / recessed / path / decking

LED: 9W
Reduced Glare: Sunken light source
Beam Angle: 20° / 30° / 38°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
(Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制埋地灯
适用于户外：走道、庭院、花园区域

LED: 9W
光束角：20° / 30° / 38°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
开孔尺寸：D65 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米
(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)


3年有限整灯品质保证

Optical Specification 配光曲线

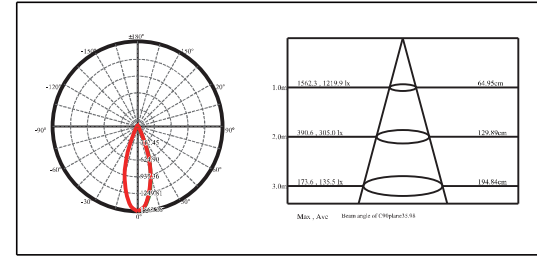

Optical Accessories 可选配件


Mounting sleeve 预埋件

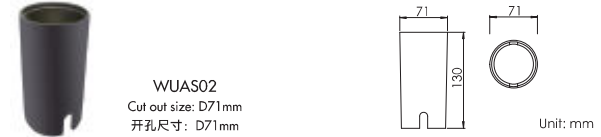

Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

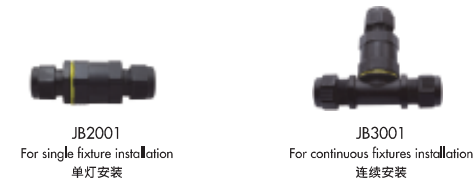


Optional finish 可选颜色




RECESSED LIGHT 埋地灯



BE-WUL0103A



BE-WUL0303B



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0103A	1W	12/24V	3000K	120lm	20°	D51	80
BE-WUL0103B	1W	12/24V	3000K	120lm	20°	D51	80
BE-WUL0303A	3W	12/24V	3000K	250lm	20°	D51	80
BE-WUL0303B	3W	12/24V	3000K	250lm	20°	D51	80

Features 产品特点

Aluminium Walkover Dimmable Up Light
For outdoor inground / recessed / path / decking

LED: 1W / 3W
Beam Angle: 20° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
Dimmable support: 1-10V

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制调光埋地灯
适用于户外：广场、走道、庭院、花园区域

LED: 1W / 3W
光束角：20° / 40° / 60°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
开孔尺寸：D51 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米
调光方式：1-10V

3年有限整灯品质保证

Optical Specification 配光曲线

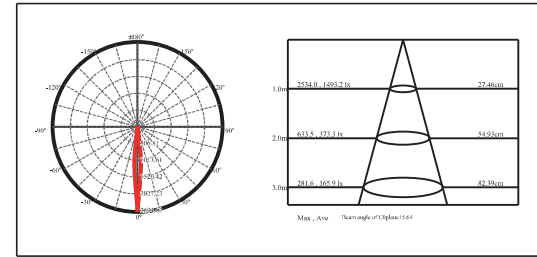


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm



Anti-glare glass lens 光学配件




WUAG04L
Linear glass lens
横纹玻璃



WUAG04S
Soften glass lens
布纹玻璃



WUAH01
Honeycomb louver
蜂巢网片



IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色



MB
Matt Black
氧化雾黑



SS
Stainless Steel
不锈钢色

RECESSED LIGHT 埋地灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-WUL0603A	6W	12/24V	3000K	550lm	25°	D65	80
BE-WUL0603B	6W	12/24V	3000K	550lm	25°	D65	80
BE-WUL0803A	8W	12/24V	3000K	750lm	25°	D65	80
BE-WUL0803B	8W	12/24V	3000K	750lm	25°	D65	80

Features 产品特点

Aluminium Walkover Dimmable Up Light
For outdoor inground / recessed / path / decking

LED: 6W / 8W
Beam Angle: 25° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable
Dimmable support: 1-10V

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制调光埋地灯
适用于户外：走道、庭院、花园区域

LED: 6W / 8W
光束角：25° / 40° / 60°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
开孔尺寸：D65 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度2米
调光方式：1-10V


3年有限整灯品质保证

Optical Specification 配光曲线

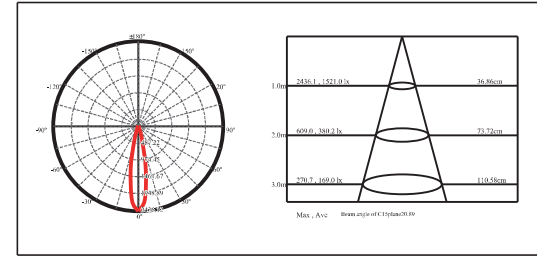

Optical Accessories 可选配件


Mounting sleeve 预埋件

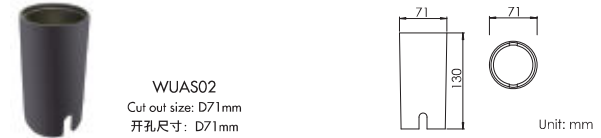

Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

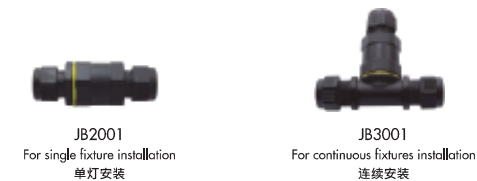

Optional finish 可选颜色

