



Underwater light

BECOSTAR
LIGHTING

UNDER-
WATER
LIGHT

水下灯

V

LIGHTING ARTISAN

UNDERWATER LIGHT 水下灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0112A	1W	12/24V	3000K	120lm	25°	D30	60
BE-UWL0112B	1W	12/24V	3000K	120lm	25°	D30	60
BE-UWL0112C	1W	12/24V	3000K	120lm	25°	D30	60

Unit: mm

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 1W
Reduced Glare: Sunken light source
Beam Angle: 25° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D30 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢水下灯
适用于泳池、喷泉、水景等区域


LED: 1W
光束角: 25° / 40° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D30 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动 · 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

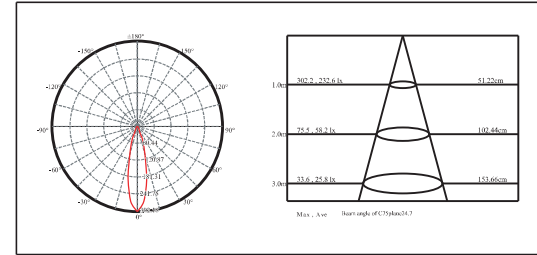


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS05
Cut out size: D33mm
开孔尺寸: D33mm



Unit: mm

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装


UNDERWATER LIGHT 水下灯



BE-UWL0312A



BE-UWL0312B



BE-UWL0312C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0312A	2W	12/24V	3000K	200lm	21°	D40	65
BE-UWL0312B	2W	12/24V	3000K	200lm	21°	D40	65
BE-UWL0312C	2W	12/24V	3000K	200lm	21°	D40	65

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 2W
Reduced Glare: Sunken light source
Beam Angle: 10° / 15° / 21° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢水下灯
适用于泳池、喷泉、水景等区域


LED: 2W
光束角: 10° / 15° / 21° / 36° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D40 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

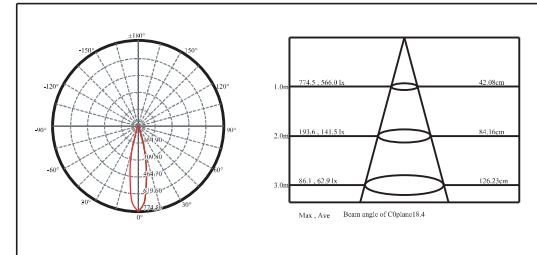


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



Unit: mm

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装


UNDERWATER LIGHT 水下灯



BE-UWL0712A



BE-UWL0712B



BE-UWL0712C

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0712A	7W	24V	3000K	750lm	38°	D65	110
BE-UWL0712B	7W	24V	3000K	750lm	38°	D65	110
BE-UWL0712C	7W	24V	3000K	750lm	38°	D65	110

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 7W
Reduced Glare: Sunken light source
Beam Angle: 15° / 25° / 38° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D65 (for deck mounting)

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢水下灯
适用于泳池、喷泉、水景等区域


LED: 7W
光束角: 15° / 25° / 38° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D65 (嵌入安装)

输入电压: 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

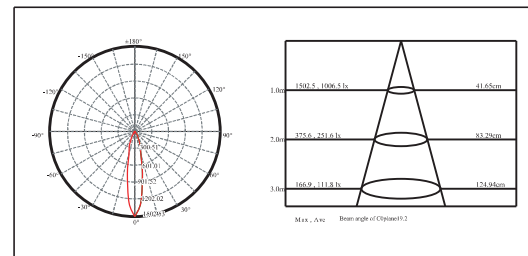


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装



UNDERWATER LIGHT 水下灯




BE-UWL0101A



Unit: mm



BE-UWL0101B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0101A	1W	12/24V	3000K	120lm	21°	D40	60
BEUWL0101B	1W	12/24V	3000K	120lm	21°	D40	60

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 1W
Beam Angle: 21° / 36°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢水下灯
适用于泳池、喷泉、水景等区域

LED: 1W
光束角: 21° / 36°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D40 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

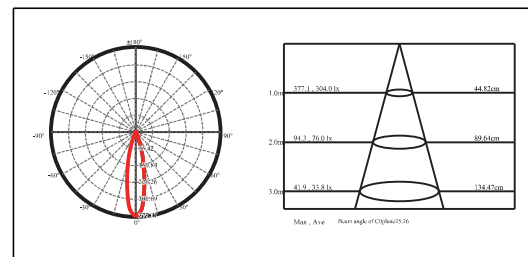


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



Unit: mm


Anti-glare glass lens 光学配件



STAG01F
Frosted glass lens
喷砂玻璃



STAG01W
Silk-screen glass lens
丝印玻璃



Unit: mm

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装



UNDERWATER LIGHT 水下灯

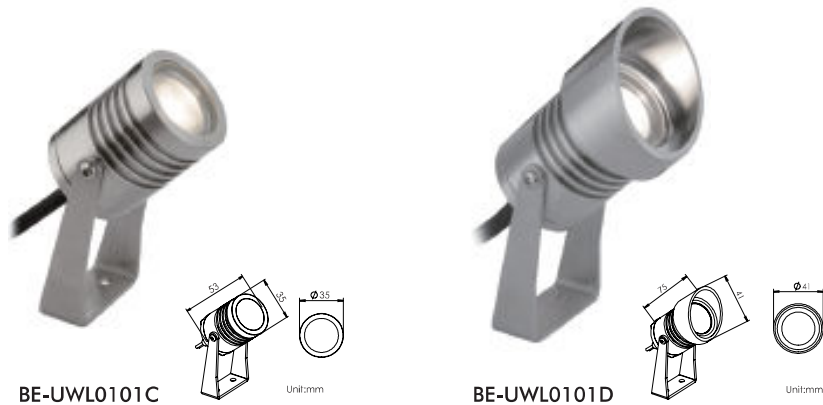

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0101C	1W	12/24V	3000K	120lm	21°	2M
BE-UWL0101D	1W	12/24V	3000K	120lm	21°	2M

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 1W
Beam Angle: 21° / 36°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢水下灯
适用于泳池、喷泉、水景等区域

LED: 1W
光束角: 21° / 36°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

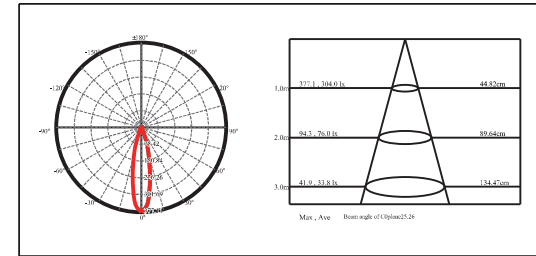

Optical Accessories 可选配件


Spike 地插



Anti-glare glass lens 光学配件




IP68 junction box 防水接线盒

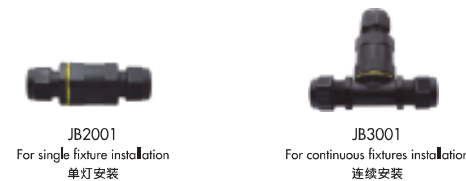

UNDERWATER LIGHT 水下灯




BE-UWL0102A



Unit: mm



BE-UWL0102B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0102A	1W	12/24V	3000K	120lm	21°	D40	60
BE-UWL0102B	1W	12/24V	3000K	120lm	21°	D40	60

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 1W
Beam Angle: 15° / 21° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢水下灯
适用于泳池、喷泉、水景等区域


LED: 1W
光束角: 15° / 21° / 36° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D40 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

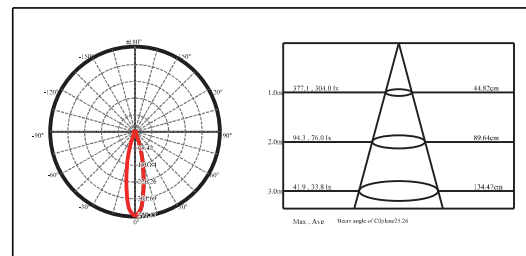


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



Unit: mm

Anti-glare glass lens 光学配件




WUAG06L
Linear glass lens
横纹玻璃



WUAG06S
Softener glass lens
布纹玻璃



WUAH03
Honeycomb louvers
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装




UNDERWATER LIGHT 水下灯



BE-UWL0102C

Unit:mm

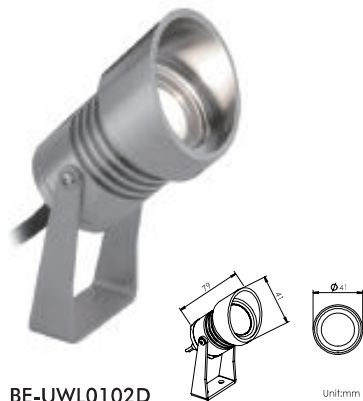

BE-UWL0102D

Unit:mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0102C	1W	12/24V	3000K	120lm	21°	2M
BE-UWL0102D	1W	12/24V	3000K	120lm	21°	2M

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 1W
Beam Angle: 15° / 21° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢水下灯
适用于泳池、喷泉、水景等区域

LED: 1W
光束角: 15° / 21° / 36° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

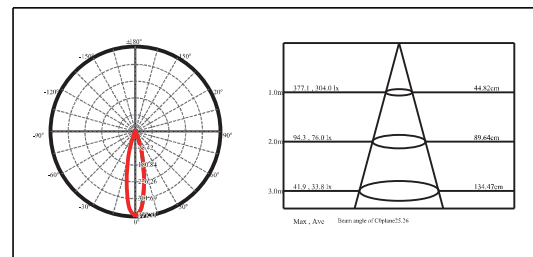

Optical Accessories 可选配件

Spike 地插



SPAS01

Unit: mm

Anti-glare glass lens 光学配件




WUAG06L
Linear glass lens
横纹玻璃



WUAG06S
Soft glass lens
布纹玻璃



WUAH03
Honeycomb louver
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装




UNDERWATER LIGHT 水下灯



BE-UWL0301A



BE-UWL0301B



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0301A	3W	12/24V	3000K	250lm	20°	D51	80
BE-UWL0301B	3W	12/24V	3000K	250lm	20°	D51	80

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 3W
Beam Angle: 20° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D51 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢水下灯
适用于泳池、喷泉、水景等区域

LED: 3W
光束角: 20° / 40° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D51 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

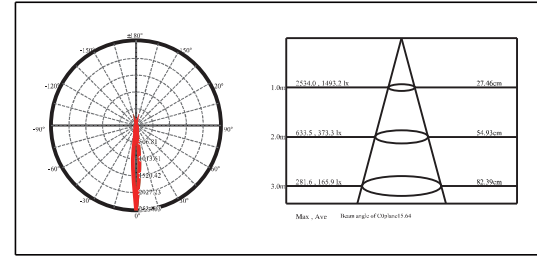


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm




Anti-glare glass lens 光学配件



WUAG01F
Frosted glass lens
喷砂玻璃



WUAG01W
Silk-screen glass lens
丝印玻璃



IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

UNDERWATER LIGHT 水下灯

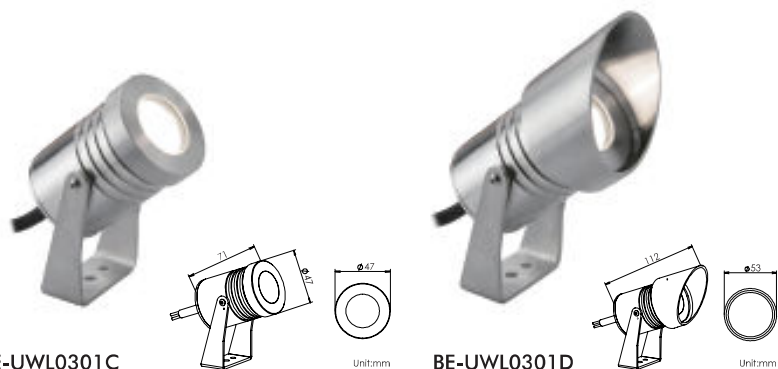

BE-UWL0301C

BE-UWL0301D

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0301C	3W	12/24V	3000K	250lm	20°	2M
BE-UWL0301D	3W	12/24V	3000K	250lm	20°	2M

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 3W
Beam Angle: 20° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

不锈钢水下灯
适用于泳池、喷泉、水景等区域


LED: 3W
光束角: 20° / 40° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动 · 自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

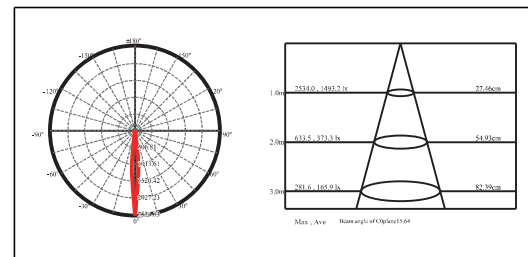

Optical Accessories 可选配件

Spike 地插



SPAS01

Unit: mm


Anti-glare glass lens 光学配件



WUAG01F
Frosted glass lens
喷砂玻璃



WUAG01W
Silk-screen glass lens
丝印玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装




UNDERWATER LIGHT 水下灯



BE-UWL0801A



BE-UWL0801B



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cut out 开孔尺寸	Recess 安装深度
BE-UWL0801C	8W	12/24V	3000K	750lm	D65	85
BE-UWL0801D	8W	12/24V	3000K	750lm	D65	85

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 8W
Beam Angle: 25° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Cut out: D65 (for deck mounting)

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢水下灯
适用于泳池、喷泉、水景等区域

LED: 8W
光束角: 25° / 40° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
开孔尺寸: D65 (嵌入安装)

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

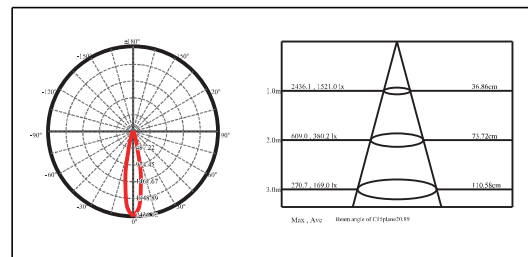


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS02
Cut out size: D71mm
开孔尺寸: D71mm



Unit: mm


Anti-glare glass lens 光学配件



WUAG02F
Frosted glass lens
磨砂玻璃



WUAG02W
Silk-screen glass lens
丝印玻璃



Unit: mm

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装



UNDERWATER LIGHT 水下灯

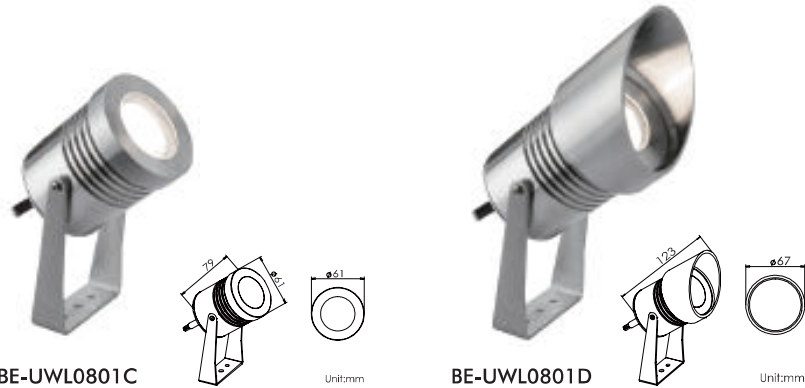

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-UWL0801C	8W	12/24V	3000K	750lm	25°	2M
BE-UWL0801D	8W	12/24V	3000K	750lm	25°	2M

Features 产品特点

Stainless Steel Underwater Light
For swimming pool / fountain / aquarium

LED: 8W
Beam Angle: 25° / 40° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Satin 316 Stainless Steel
IP rated: IP68
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


不锈钢水下灯
适用于泳池、喷泉、水景等区域

LED: 8W
光束角: 25° / 40° / 60°
色温: 2700K / 3000K / 4000K
颜色: 不锈钢316
防护等级: IP68
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动 · 自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

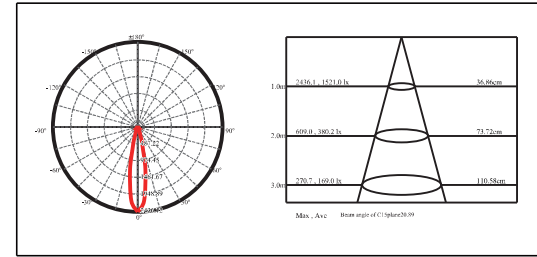

Optical Accessories 可选配件

Spike 地插



Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

