

A photograph of a spot light illuminating a bush at night. The light is a warm, golden-yellow color, highlighting the green leaves of the bush. The background is dark, suggesting a night scene. The spot light is a cylindrical, metallic-looking fixture mounted on a small stand, positioned in the lower right of the frame. The overall mood is serene and focused.

Spot light

BECOSTAR
LIGHTING

SPOT
LIGHT


投射灯

LIGHTING ARTISAN

SPOT LIGHT 投射灯




BE-SPL0111A



Unit: mm



BE-SPL0111B



Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0111A	1W	350mA	3000K	120lm	21°	2M
BE-SPL0111B	1W	350mA	3000K	120lm	21°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

Input Current: 350mA, 3-4V DC with 2M of power cable

Dimmable support: DALI / DMX / 1-10V / Triac / PWM

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP67


安装方式：U形支架 / 地插

输入电流：350mA, 3-4V DC; 自带配线长度2米

调光方式：DALI / DMX / 1-10V / 可控硅 / PWM

3年有限整灯品质保证

Optical Specification 配光曲线

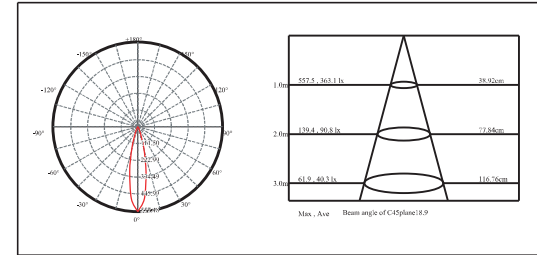

Optical Accessories 可选配件

Spike 地插



Anti-glare glass lens 光学配件




WUAG06L
Linear glass lens
横纹玻璃



WUAG06S
Soften glass lens
布纹玻璃



WUAH03
Honeycomb louver
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB1001
For single fixture installation
单灯安装



WCC001
For continuous fixtures installation
连续安装

SPOT LIGHT 投射灯



BE-SPL0112A



BE-SPL0112B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0112A	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0112B	1W	12/24V	3000K	120lm	21°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Reduced Glare: Sunken light source

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

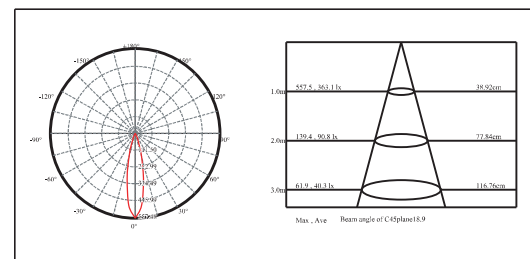

Optical Accessories 可选配件

Spike 地插



SPAS01

Anti-glare glass lens 光学配件




WUAG06L
Linear glass lens
横纹玻璃



WUAG06S
Soften glass lens
布纹玻璃



WUAH03
Honeycomb louver
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装

SPOT LIGHT 投射灯




BE-SPL0312A



Unit: mm



BE-SPL0312B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0312A	3W	12/24V	3000K	250lm	10°	2M
BE-SPL0312B	3W	12/24V	3000K	250lm	10°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 3W

Reduced Glare: Sunken light source

Beam Angle: 3° / 6° / 10° / 20° / 40°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 3W

光束角：3° / 6° / 10° / 20° / 40°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

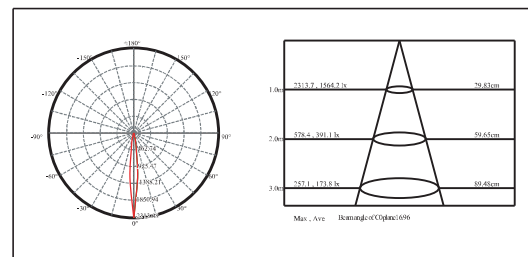


Optical Accessories 可选配件

Spike 地插



SPAS01



Unit: mm

Anti-glare glass lens 光学配件




SPAG02L
Linear glass lens
横纹玻璃



SPAG02S
Soften glass lens
布纹玻璃



SPAH02
Honeycomb louver
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

SPOT LIGHT 投射灯

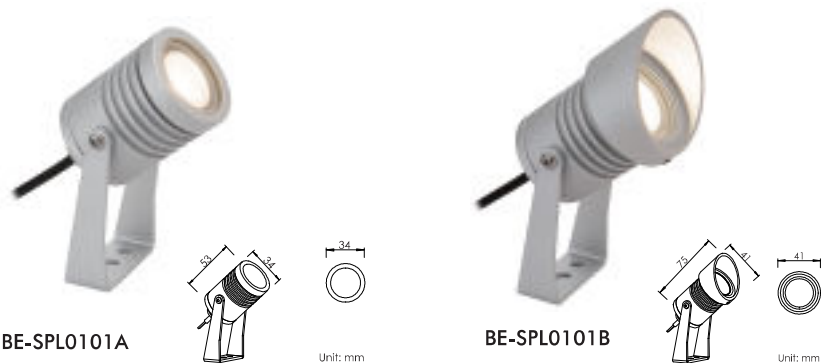

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0101A	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0101B	1W	12/24V	3000K	120lm	21°	2M

Features 产品特点

Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 1W
Beam Angle: 21° / 36°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP65
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制投射灯
适用于户外：走道、庭院、花园区域

LED: 1W
光束角：21° / 36°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP65
安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

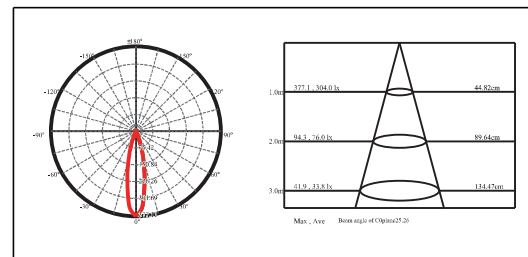

Optical Accessories 可选配件


Spike 地插



Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

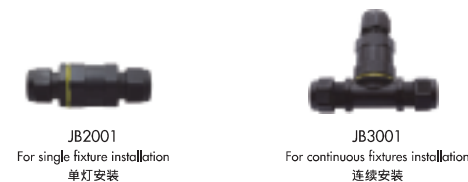

Optional finish 可选颜色




SPOT LIGHT

SPOT LIGHT 投射灯




BE-SPL0501A



Unit: mm



BE-SPL0301B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0301A	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0301B	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0501A	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0501B	5W	12/24V	3000K	550lm	24°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 5W / 3W

Beam Angle: 5W (24° / 40° / 60°); 3W (20° / 40° / 60°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 5W / 3W

光束角：5W (24° / 40° / 60°); 3W (20° / 40° / 60°)

色温：2700K / 3000K / 4000K

颜色：氧化雾银

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

(注：因5W内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

Optical Specification 配光曲线

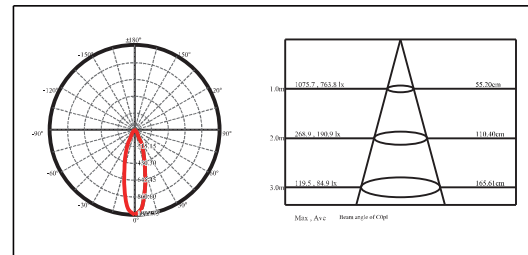


Optical Accessories 可选配件

Spike 地插



SPAS01



Unit: mm


Anti-glare glass lens 光学配件



WUAG01F
Frosted glass lens
喷砂玻璃



WUAG01W
Silk-screen glass lens
丝网玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色




MB
Matt Black
氧化雾黑

SPOT LIGHT

SPOT LIGHT 投射灯




BE-SPL0901A



Unit: mm



BE-SPL0801B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0801A	8W	12/24V	3000K	750lm	25°	2M
BE-SPL0801B	8W	12/24V	3000K	750lm	25°	2M
BE-SPL0901A	9W	12/24V	3000K	1050lm	20°	2M
BE-SPL0901B	9W	12/24V	3000K	1050lm	20°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 9W / 8W

Beam Angle: 9W (20° / 30° / 38°); 8W (25° / 40° / 60°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 9W / 8W

光束角：9W (20° / 30° / 38°); 8W (25° / 40° / 60°)

色温：2700K / 3000K / 4000K

颜色：氧化雾银

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米

(注：因9W内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Optical Specification 配光曲线

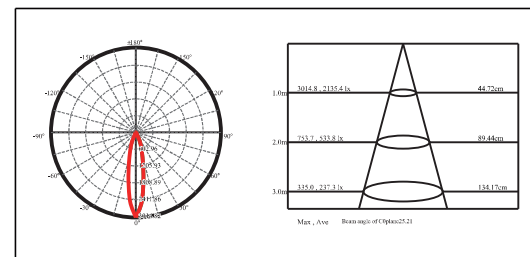


Optical Accessories 可选配件

Spike 地插



SPAS01



Unit: mm


Anti-glare glass lens 光学配件



WUAG02F
Frosted glass lens
喷砂玻璃



WUAG02W
Silk-screen glass lens
丝印玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色



MB
Matt Black
氧化雾黑



SPOT LIGHT 投射灯



BE-SPL0701A



BE-SPL0701B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0701A	7W	24V	3000K	500lm	12°	2M
BE-SPL0701B	7W	24V	3000K	500lm	12°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 7W
 Reduced Glare: Sunken light source
 Beam Angle: 12° / 17° / 25° / 40° / 60°
 Color Temperature: 2700K / 3000K / 4000K
 Finish: Matt Black Anodized
 IP rated: IP67
 Mounting Type: U bracket for solid ground; spike for soft ground

24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

铝制投射灯

适用于户外：走道、庭院、花园区域


LED: 7W
 光束角：12° / 17° / 25° / 40° / 60°
 色温：2700K / 3000K / 4000K
 颜色：氧化雾黑
 防护等级：IP67
 安装方式：U形支架 / 地插

输入电压：24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

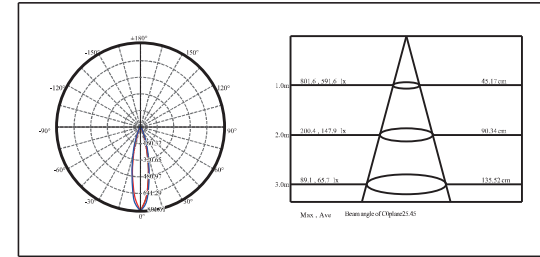

Optical Accessories 可选配件

Spike 地插



SPAS01

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

SPOT LIGHT 投射灯

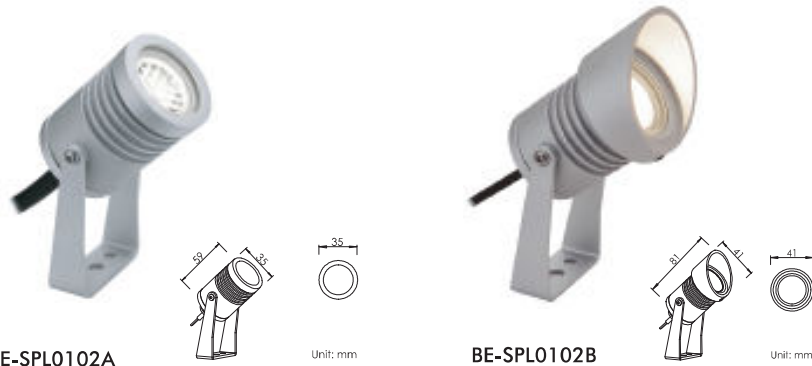

BE-SPL0102A

BE-SPL0102B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0102A	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0102B	1W	12/24V	3000K	120lm	21°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W

Beam Angle: 10° / 15° / 21° / 36° / 60°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W

光束角：10° / 15° / 21° / 36° / 60°

色温：2700K / 3000K / 4000K

颜色：氧化雾银


防护等级：IP67

安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

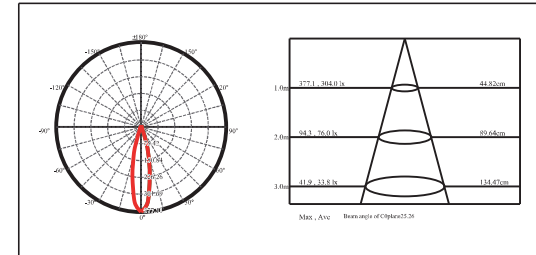

Optical Accessories 可选配件

Spike 地插



SPAS01

Unit: mm

Anti-glare glass lens 光学配件




WUAG06L
Linear glass lens
横纹玻璃



WUAG06S
Soften glass lens
布纹玻璃



WUAH03
Honeycomb louvers
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装




JB3001
For continuous fixtures installation
连续安装

Optional finish 可选颜色



MB
Matt Black
氧化雾黑

SPOT LIGHT 投射灯

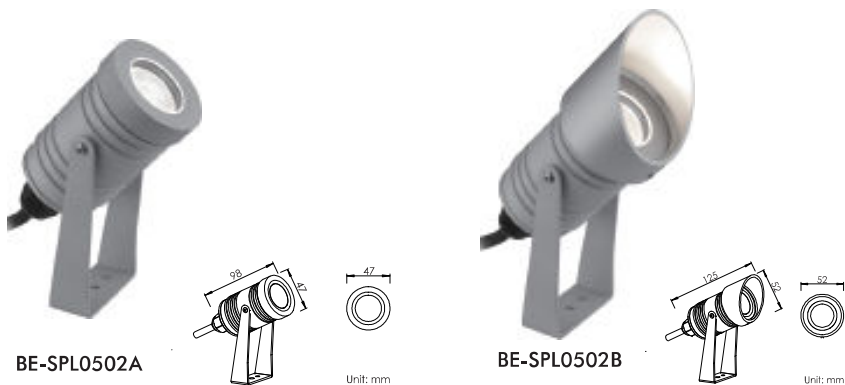

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0502A	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0502B	5W	12/24V	3000K	550lm	24°	2M

Features 产品特点

Aluminium Spot Light For outdoor access/spot/wall wash/landscape

LED: 5W
 Reduced Glare: Sunken light source
 Beam Angle: 24° / 40° / 60°
 Color Temperature: 2700K / 3000K / 4000K
 Finish: Matt Silver Anodized
 IP rated: IP67
 Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable
 (Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制投射灯 适用于户外：走道、庭院、花园区域

LED: 5W
 光束角: 24° / 40° / 60°
 色温: 2700K / 3000K / 4000K
 颜色: 氧化雾银
 防护等级: IP67
 安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米
 (注: 因内置驱动启动电流要求较高, 请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

Optical Specification 配光曲线

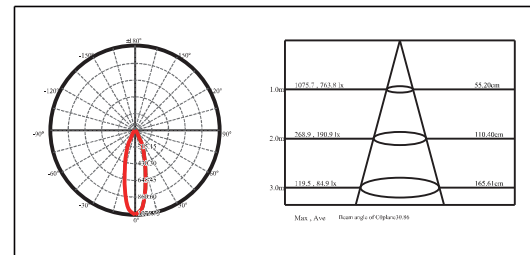

Optical Accessories 可选配件


Spike 地插



Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

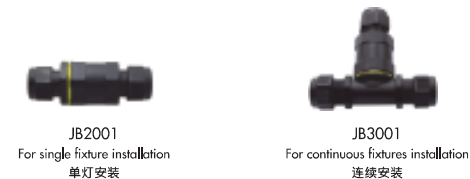

Optional finish 可选颜色



SPOT LIGHT 投射灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0902A	9W	12/24V	3000K	1050lm	20°	2M
BE-SPL0902B	9W	12/24V	3000K	1050lm	20°	2M

Features 产品特点

Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 9W
Reduced Glare: Sunken light source
Beam Angle: 20° / 30° / 38°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable
(Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制投射灯
适用于户外：走道、庭院、花园区域

LED: 9W
光束角：20° / 30° / 38°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP67
安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米
(注：因内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Optical Specification 配光曲线

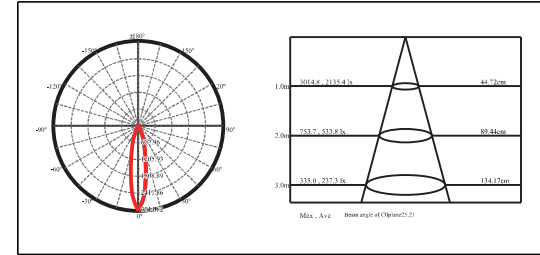

Optical Accessories 可选配件


Spike 地插



Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

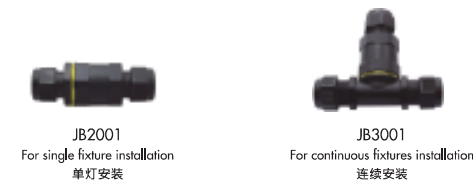

Optional finish 可选颜色



SPOT LIGHT

SPOT LIGHT 投射灯



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0103	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0303	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0503	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0903	9W	12/24V	3000K	1050lm	20°	2M

Unit: mm

Features 产品特点

Brass Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W / 3W / 5W / 9W

Reduced Glare: Sunken light source

Beam Angle: 1W (21° / 36°); 3W (20° / 40° / 60°);

5W (24° / 40° / 60°); 9W (20° / 30° / 38°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Antique Brass

IP rated: IP67

Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up; 9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

铜制投射灯

适用于户外：走道、庭院、花园区域

LED: 1W / 3W / 5W / 9W

光束角：1W (21° / 36°); 3W (20° / 40° / 60°);

5W (24° / 40° / 60°); 9W (20° / 30° / 38°)

色温：2700K / 3000K / 4000K

颜色：青古铜色

防护等级：IP67


安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米
(注：因5W内置驱动启动电流要求较高·请保证电源功率高于灯具功率4倍；因9W内置驱动启动电流要求较高·请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

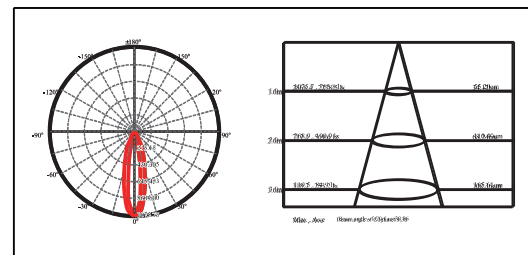


Optical Accessories 可选配件

Spike 地插



SPAS01



Unit: mm

IP68 junction box 防水接线盒



JB2001

For single fixture installation
单灯安装



JB3001

For continuous fixtures installation
连续安装


Optional finish 可选颜色



BB

Brushed Brass
黄铜色

SPOT LIGHT 投射灯

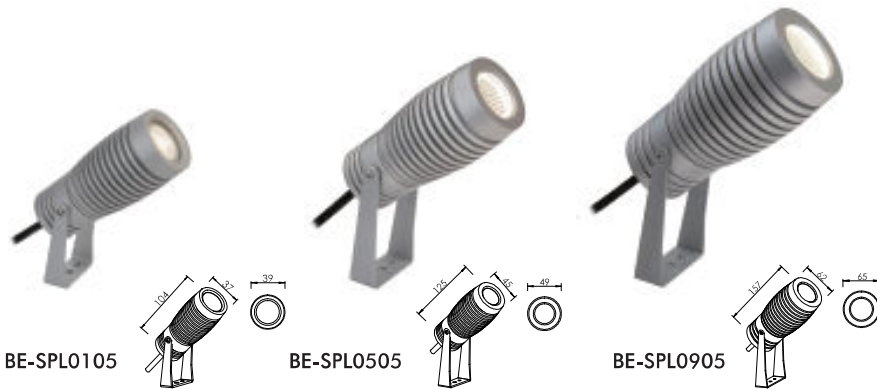

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0105	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0505	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0905	9W	12/24V	3000K	1050lm	20°	2M

Unit: mm

Features 产品特点

Brass Spot Light For outdoor access/spot/wall wash/landscape

LED: 1W / 5W / 9W
 Reduced Glare: Sunken light source
 Beam Angle: 1W (21° / 36°); 5W (24° / 40° / 60°);
 9W (20° / 30° / 38°)
 Color Temperature: 2700K / 3000K / 4000K
 Finish: Matt Silver Anodized
 IP rated: IP67
 Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable
 (5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up; 9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

铜制投射灯 适用于户外：走道、庭院、花园区域


LED: 1W / 5W / 9W
 光束角：1W (21° / 36°); 5W (24° / 40° / 60°);
 9W (20° / 30° / 38°)
 色温：2700K / 3000K / 4000K
 颜色：氧化雾银
 防护等级：IP67
 安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米
 (注：因5W内置驱动启动电流要求较高，请保证电源功率高于灯具功率4倍；因9W内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

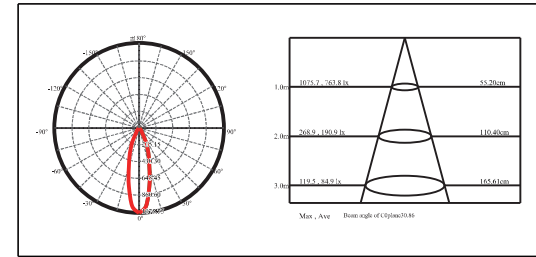


Optical Accessories 可选配件

Spike 地插




IP68 junction box 防水接线盒

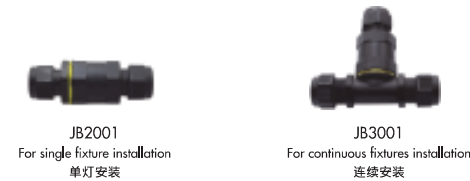

Optional finish 可选颜色



SPOT LIGHT 投射灯

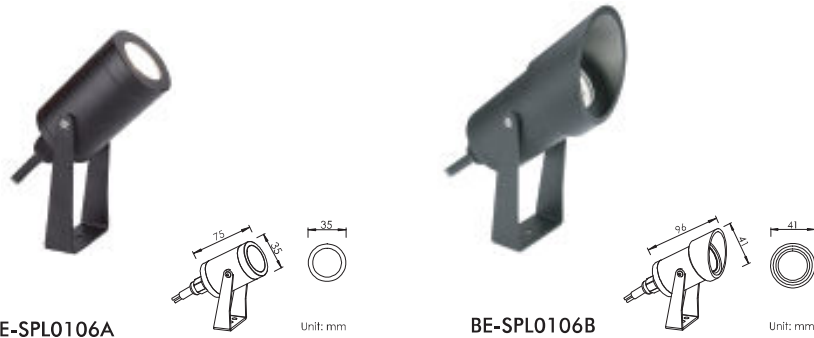

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0106A	1W	12/24V	3000K	120lm	21°	2M
BE-SPL0106B	1W	12/24V	3000K	120lm	21°	2M

Features 产品特点

Aluminium Spot Light

For outdoor access/spot/wall wash/landscape

LED: 1W
 Reduced Glare: Sunken light source
 Beam Angle: 10° / 15° / 21° / 36° / 60°
 Color Temperature: 2700K / 3000K / 4000K
 Finish: Powder Coated Black
 IP rated: IP67
 Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制投射灯


适用于户外：走道、庭院、花园区域

LED: 1W
 光束角：10° / 15° / 21° / 36° / 60°
 色温：2700K / 3000K / 4000K
 颜色：喷粉黑
 防护等级：IP67
 安装方式：U形支架 / 地插

输入电压：12 / 24VDC；内置DC-DC驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

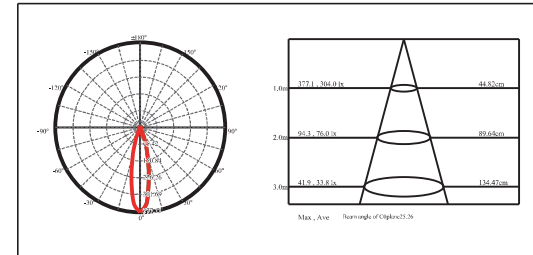

Optical Accessories 可选配件


Spike 地插




Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

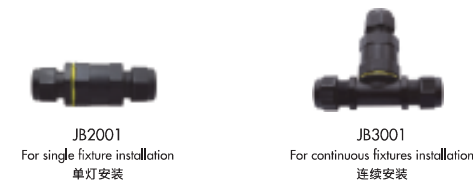

SPOT LIGHT 投射灯

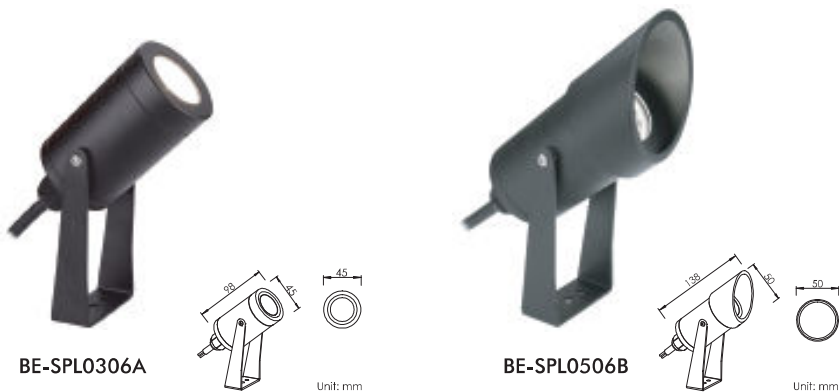

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0306A	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0306B	3W	12/24V	3000K	250lm	20°	2M
BE-SPL0506A	5W	12/24V	3000K	550lm	24°	2M
BE-SPL0506B	5W	12/24V	3000K	550lm	24°	2M

Features 产品特点

Die Casting Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 3W / 5W
Reduced Glare: Sunken light source
Beam Angle: 3W (20° / 40° / 60°); 5W (24° / 40° / 60°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Powder Coated Black
IP rated: IP67
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


铝制投射灯
适用于户外：走道、庭院、花园区域

LED: 3W / 5W
光束角: 3W (20° / 40° / 60°); 5W (24° / 40° / 60°)
色温: 2700K / 3000K / 4000K
颜色: 喷粉黑
防护等级: IP67
安装方式: U形支架 / 地插

输入电压: 12 / 24VDC; 内置DC-DC驱动·自带配线长度2米
(注: 因5W内置驱动启动电流要求较高, 请保证电源功率高于灯具功率4倍)

3年有限整灯品质保证

Optical Specification 配光曲线

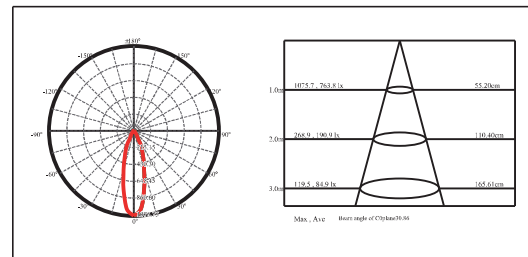

Optical Accessories 可选配件


Spike 地插




Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

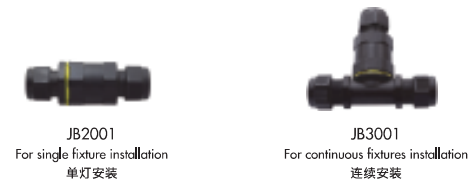

SPOT LIGHT 投射灯

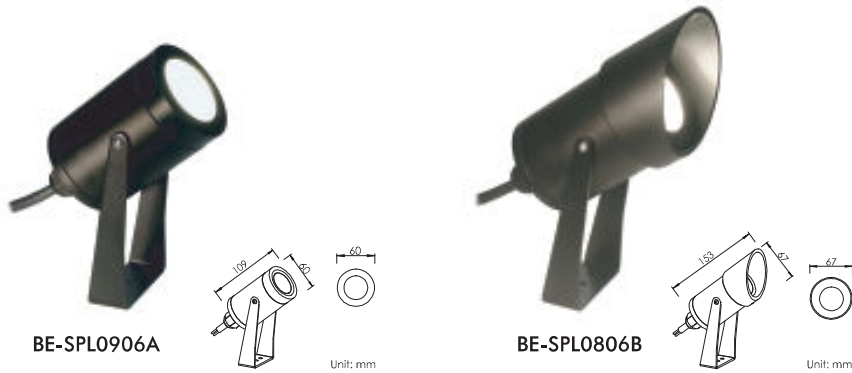

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPL0806A	8W	12/24V	3000K	750lm	25°	2M
BE-SPL0806B	8W	12/24V	3000K	750lm	25°	2M
BE-SPL0906A	9W	12/24V	3000K	1050lm	15°	2M
BE-SPL0906B	9W	12/24V	3000K	1050lm	15°	2M

Features 产品特点

Die Casting Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 8W / 9W
Reduced Glare: Sunken light source
Beam Angle: 8W (25° / 40° / 60°); 9W (15° / 25° / 38° / 60°)
Color Temperature: 2700K / 3000K / 4000K
Finish: Powder Coated Black
IP rated: IP67
Mounting Type: U bracket for solid ground; spike for soft ground

12/24VDC input, built-in DC driver with 2M of power cable
(9W: Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

铝制投射灯
适用于户外：走道、庭院、花园区域


LED: 8W / 9W
光束角：8W (25° / 40° / 60°); 9W (15° / 25° / 38° / 60°)
色温：2700K / 3000K / 4000K
颜色：喷粉黑
防护等级：IP67
安装方式：U形支架 / 地插

输入电压：12 / 24VDC; 内置DC-DC驱动·自带配线长度2米
(注：因9W内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Specification 配光曲线

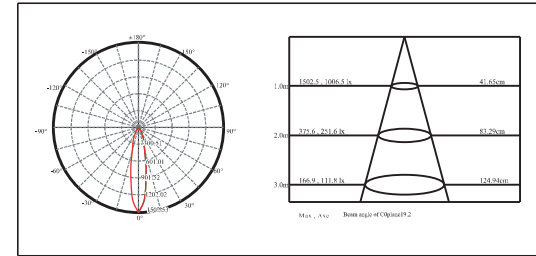

Optical Accessories 可选配件


Spike 地插




Anti-glare glass lens 光学配件



IP68 junction box 防水接线盒

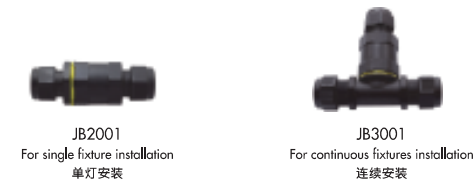

SPOT LIGHT 投射灯

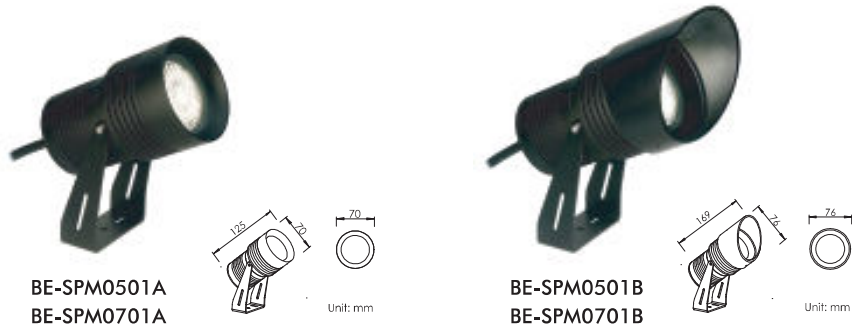

BE-SPM0501A
BE-SPM0701A

BE-SPM0501B
BE-SPM0701B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPM0501A	5W	220-240VAC	3000K	550lm	15°	2M
BE-SPM0501B	5W	220-240VAC	3000K	550lm	15°	2M
BE-SPM0701A	7W	220-240VAC	3000K	750lm	15°	2M
BE-SPM0701B	7W	220-240VAC	3000K	750lm	15°	2M

Features 产品特点

Main Voltage Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 5W / 7W
Reduced Glare: Sunken light source
Beam Angle: 15° / 24° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Black Anodized
IP rated: IP67
Mounting Type: U bracket for solid ground; spike for soft ground

220-240VAC input, built-in driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


高压铝制投射灯
适用于户外：走道、庭院、花园区域

LED: 5W / 7W
光束角：15° / 24° / 36° / 60°
色温：2700K / 3000K / 4000K
颜色：氧化雾黑
防护等级：IP67
安装方式：U形支架 / 地插

输入电压：220-240VAC；内置驱动，自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

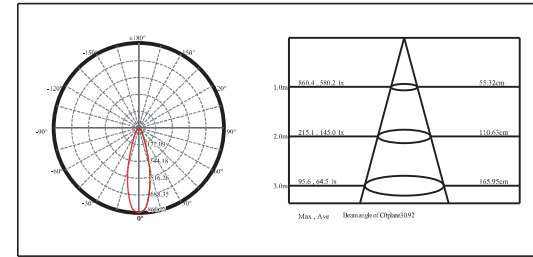

Optical Accessories 可选配件

Spike 地插



SPAS01

Unit: mm

Anti-glare glass lens 光学配件




WUAG05L
Linear glass lens
横纹玻璃



WUAG05S
Soft glass lens
布纹玻璃



WUAH02
Honeycomb louvers
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒




JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

SPOT LIGHT 投射灯

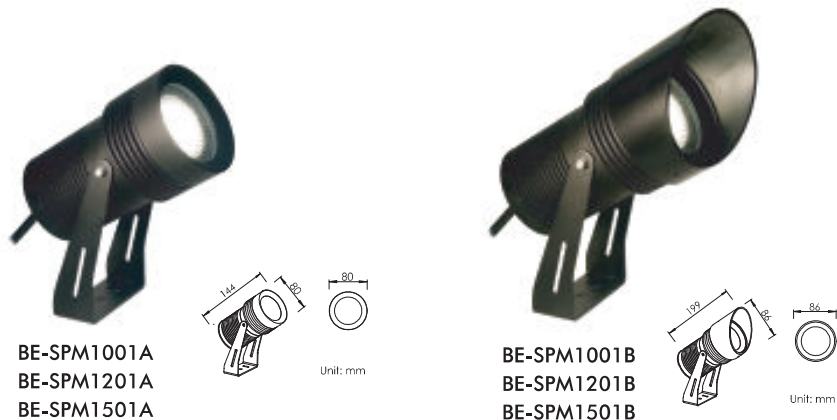

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPM1001A/B	10W	220-240VAC	3000K	1150lm	15°	2M
BE-SPM1201A/B	12W	220-240VAC	3000K	1350lm	15°	2M
BE-SPM1501A/B	15W	220-240VAC	3000K	1650lm	15°	2M

Features 产品特点

Main Voltage Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 10W / 12W / 15W
Reduced Glare: Sunken light source
Beam Angle: 15° / 24° / 36° / 50°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Black Anodized
IP rated: IP67
Mounting Type: U bracket for solid ground; spike for soft ground

220-240VAC input, built-in driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


高压铝制投射灯
适用于户外：走道、庭院、花园区域

LED: 10W / 12W / 15W
光束角：15° / 24° / 36° / 50°
色温：2700K / 3000K / 4000K
颜色：氧化雾黑
防护等级：IP67
安装方式：U形支架 / 地插

输入电压：220-240VAC；内置驱动·自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

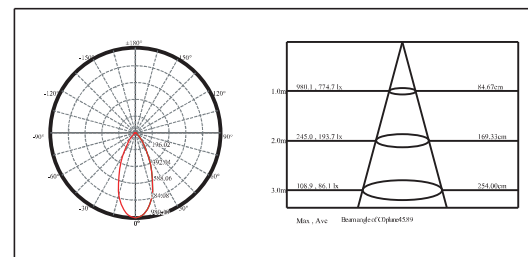

Optical Accessories 可选配件


Spike 地插



Anti-glare glass lens 光学配件




IP68 junction box 防水接线盒

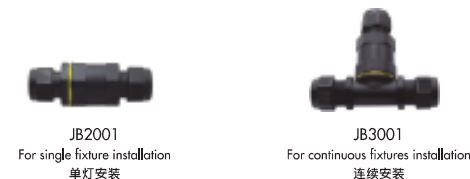

SPOT LIGHT 投射灯




BE-SPM1801A
BE-SPM2001A
BE-SPM2501A



Unit: mm

BE-SPM1801B
BE-SPM2001B
BE-SPM2501B



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cable length 电线长度
BE-SPM1801A/B	18W	220-240VAC	3000K	2000lm	15°	2M
BE-SPM2001A/B	20W	220-240VAC	3000K	2250lm	15°	2M
BE-SPM2501A/B	25W	220-240VAC	3000K	2750lm	15°	2M

Features 产品特点

Main Voltage Aluminium Spot Light
For outdoor access/spot/wall wash/landscape

LED: 18W / 20W / 25W
Reduced Glare: Sunken light source
Beam Angle: 15° / 24° / 36° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Black Anodized
IP rated: IP67
Mounting Type: U bracket for solid ground; spike for soft ground

220-240VAC input, built-in driver with 2M of power cable

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


高压铝制投射灯
适用于户外：走道、庭院、花园区域

LED: 18W / 20W / 25W
光束角：15° / 24° / 36° / 60°
色温：2700K / 3000K / 4000K
颜色：氧化雾黑
防护等级：IP67
安装方式：U形支架 / 地插

输入电压：220-240VAC；内置驱动，自带配线长度2米

3年有限整灯品质保证

Optical Specification 配光曲线

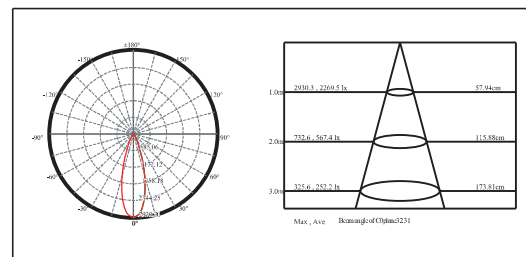


Optical Accessories 可选配件

Spike 地插



SPAS01



Unit: mm

Anti-glare glass lens 光学配件




SPAG01L
Linear glass lens
横纹玻璃



SPAG01S
Soften glass lens
布纹玻璃



SPAH01
Honeycomb louver
蜂巢网片



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装

WALL MOUNTING 墙壁安装件



SPAW01



SPAW02



SPAW03

Item number 产品型号	Material 材料	Diameter 外径	Height 高度	Thread 螺纹规格	Application Watts 适配功率
SPAW01	Aluminium 铝	D60mm	15mm	M5	1W
SPAW02	Aluminium 铝	D60mm	15mm	M5	3W / 5W
SPAW03	Aluminium 铝	D60mm	15mm	M5	8W / 9W

Optional finish 可选颜色



BK
Powder Coated Black
喷粉黑




MS
Matt Silver
氧化雾银

Application 产品应用



SPL0102B & SPAW01

TREE MOUNTING 树干安装件

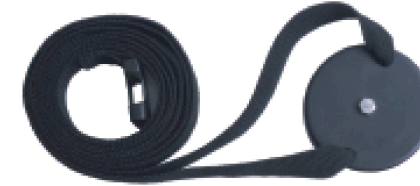

SPAT01 / SPAT02 / SPAT03

Item number 产品型号	Material 材料	Diameter 外径	Height 高度	Belt Size 绑带长度	Application Watts 适配功率
SPAT01	Aluminium 铝	D60mm	15mm	M5	1W
SPAT02	Aluminium 铝	D60mm	15mm	M5	3W / 5W
SPAT03	Aluminium 铝	D60mm	15mm	M5	8W / 9W

Optional finish 可选颜色



BK
Powder Coated Black
喷粉黑



MS
Matt Silver
氧化雾银

Application 产品应用



SPL0902B & SPAT03

SPOT
LIGHT