


STEP LIGHT

阶 梯 灯


Step light

BECOSTAR
LIGHTING


LIGHTING ARTISAN

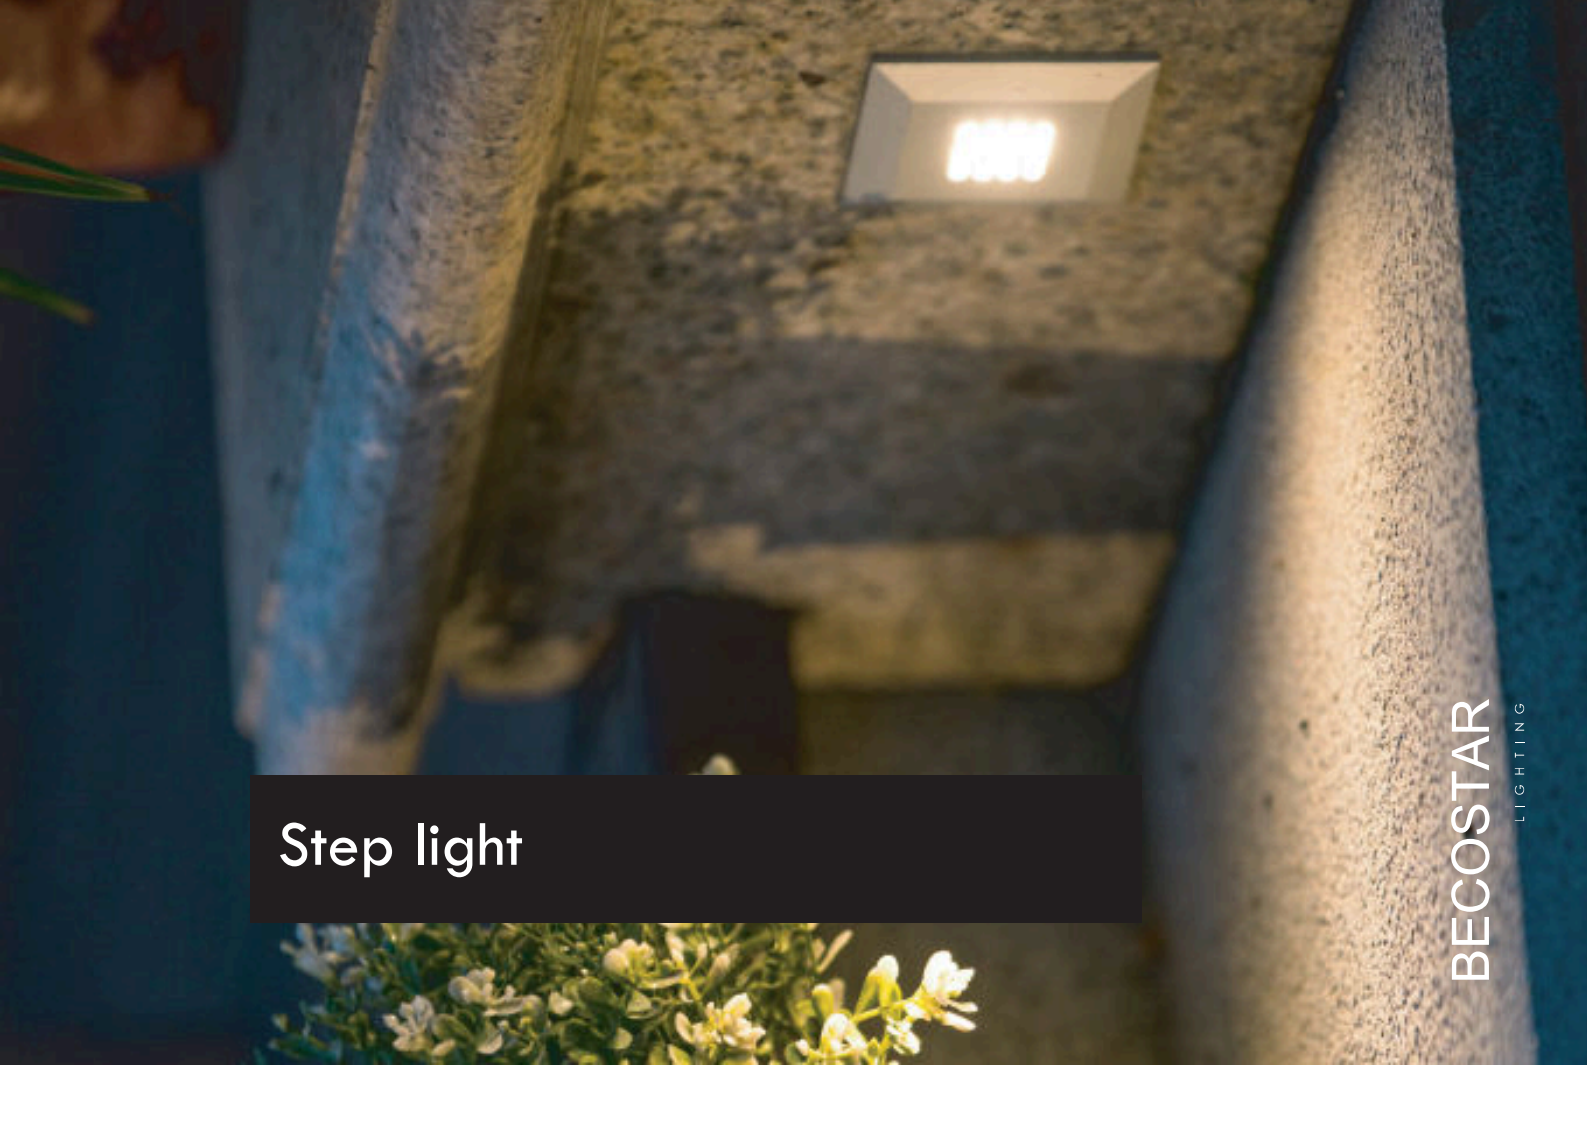


STEP LIGHT 阶梯灯




BE-STL0111A



BE-STL0111B



BE-STL0111C



BE-STL0111D



Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0111A	1W	350mA	3000K	120lm	1m	D40	40
BE-STL0111B	1W	350mA	3000K	120lm	1m	D40	40

Unit: mm

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0111C	1W	350mA	3000K	120lm	1m	D40	40
BE-STL0111D	1W	350mA	3000K	120lm	1m	D40	40

Unit: mm

Features 产品特点

Aluminium Step Light

For outdoor step / decking / marker

LED: 1W
Beam Angle: Asymmetric
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D40

Input current: 350mA, 3-4V DC with 1M of power cable
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制阶梯灯

适用于户外：楼梯、走道、台阶等区域

LED: 1W
光夹角：偏光
色温：2700K / 3000K / 4000K
颜色：哑化雾银
防护等级：IP67
开孔尺寸：D40

输入电流：350mA, 3-4V DC; 自带配线长度1米
(注：灯具安装时，推荐使用防水接线器WCC001)

3年有限灯具品质保证

Features 产品特点

Aluminium Step Light

For outdoor step / decking / marker

LED: 1W
Beam Angle: Asymmetric
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D40

Input current: 350mA, 3-4V DC with 1M of power cable
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

铝制阶梯灯


适用于户外：楼梯、走道、台阶等区域

LED: 1W
光夹角：偏光
色温：2700K / 3000K / 4000K
颜色：哑化雾银
防护等级：IP67
开孔尺寸：D40


输入电流：350mA, 3-4V DC; 自带配线长度1米
(注：灯具安装时，推荐使用防水接线器WCC001)

3年有限灯具品质保证

STEP LIGHT 阶梯灯



BE-STL0312A



BE-STL0312B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0312A	2W	12/24V	3000K	200lm	1m	D52	70
BE-STL0312B	2W	12/24V	3000K	200lm	1m	D52	70

Features 产品特点

Aluminium Step Light
For outdoor step / decking / marker

LED: 2W
Beam Angle: Asymmetric
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP65
Cut out: D52 (for deck mounting)

12/24VDC input, built-in DC driver with 1M of power cable
3 year limited guarantee

铝制阶梯灯

适用于户外：楼梯、走廊、台阶等区域

LED: 2W
光束角：偏光
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP65
开孔尺寸：D52 (嵌入式安装)

输入电压：12 / 24VDC, 内置DC-DC驱动, 自带配线长度1米
3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm



Unit: mm

IP68 junction box 防水接线盒



JB2001
For single fixture installation
单灯安装



JB3001
For continuous fixtures installation
连续安装


Optional finish 可选颜色




MB
Matt Black
哑光雾黑



STEP LIGHT 阶梯灯



BE-STL0101A



BE-STL0101B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0101A	1W	12/24V	3000K	120lm	21°	D40	55
BE-STL0101B	1W	12/24V	3000K	120lm	21°	D40	55

Features 产品特点

Aluminium Step Light
For outdoor step / decking / marker

LED: 1W
Beam Angle: 21° / 36°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP65
Cut out: D40 (for deck mounting)

12/24VDC input, built-in DC driver with 1M of power cable
3 year limited guarantee

铝制阶梯灯
适用于户外：楼梯、走廊、台阶等区域

LED: 1W
光束角：21° / 36°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP65
开孔尺寸：D40 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动，自带配线长度1米
3年有限整灯品质保证


Patent 专利 #: ZL 2015 2 0276208.6

Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01
Cut out size: D41mm
开孔尺寸: D41mm



Unit: mm


Anti-glare glass lens 光学配件



STAG01F
Frosted glass lens
喷砂玻璃



STAG01W
Silk-screen glass lens
丝网玻璃



Unit:mm

IP68 junction box 防水接线盒



JB1001
For single fixture installation
单灯安装

Optional style 可选款式



BE-STL0101C



BE-STL0101E



BE-STL0101X



BE-STL0101D




BE-STL0101F

Optional finish 可选颜色




MB
Matt Black
氧化雾黑

STEP LIGHT 阶梯灯



BE-STL0102A



BE-STL0102B

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0102A	1W	350mA	3000K	120lm	25°	D16	35
BE-STL0102B	1W	350mA	3000K	120lm	25°	D16	35

Features 产品特点

Aluminium Step Light


For outdoor step / decking / marker

LED: 1W
Beam Angle: 25° / 45° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D16


Input current: 350mA, 3-4V DC with 1M of power cable
(The waterproof cable connector - WCC001 - is recommended for making connections)

3 year limited guarantee

Patent #. ZL 2015 2 0276208.6



BE-STL0101C



BE-STL0102D

Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0102C	1W	350mA	3000K	120lm	25°	D20	35
BE-STL0102D	1W	350mA	3000K	120lm	25°	D20	35

Features 产品特点

Aluminium Step Light

For outdoor step / decking / marker


LED: 1W
Beam Angle: 25° / 45° / 60°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP67
Cut out: D20

Input current: 350mA, 3-4V DC with 1M of power cable
(The waterproof cable connector - WCC001 - is recommended for making connections)


3 year limited guarantee

Patent #. ZL 2015 2 0276208.6

STEP LIGHT 阶梯灯



BE-STL0103A



BE-STL0103B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCCT 色温	LED Lumens 光通量	Beam Angle 光束角	Cut out 开孔尺寸	Recess 安装深度
BE-STL0103A	0.5W	12/24V	3000K	75lm	40°	D35	55
BE-STL0103B	0.5W	12/24V	3000K	75lm	40°	D35	55

Features 产品特点

Aluminium Step Light
For outdoor step / decking / marker

LED: 0.5W
Beam Angle: 40°
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP65
Cut out: D35 (for deck mounting)

12/24VDC input, built-in DC driver with 1M of power cable
3 year limited guarantee

铝制阶梯灯
适用于户外：楼梯、走道、台阶等区域

LED: 0.5W
光束角：40°
色温：2700K / 3000K / 4000K
颜色：氧化雾银
防护等级：IP65
开孔尺寸：D35 (嵌入安装)

输入电压：12 / 24VDC；内置DC-DC驱动；自带导线长度1米
3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS02
Cut out size: D40mm
开孔尺寸: D40mm

Anti-glare glass lens 光学配件



STAG01F
Frosted glass lens
磨砂玻璃

STAG01W
Silk-screen glass lens
丝印玻璃

IP68 junction box 防水接线盒



JB1001
For single fixture installation
单灯安装

Optional style 可选款式



BE-STL0103C



BE-STL0103E



BE-STL0103X



BE-STL0103D




BE-STL0103F

Optional finish 可选颜色




MB
Matt Black
氧化雾黑

STEP LIGHT 阶梯灯



BE-STL0104A



BE-STL0104B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0104A	1W	24VDC	3000K	150lm	1m	D51	50
BE-STL0104B	1W	24VDC	3000K	150lm	1m	D51	50
BE-STL0204A	2W	24VDC	3000K	280lm	1m	D51	50
BE-STL0204B	2W	24VDC	3000K	280lm	1m	D51	50

Features 产品特点

Aluminium Dimmable Step Light
For outdoor step / decking / marker

LED: 1W / 2W
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP65
Cut out: D55 (for deck mounting)

24VDC input, with 1M of power cable
Dimmable support: 1-10V

3 year limited guarantee

铝制调光阶梯灯
适用于户外：楼梯、走道、台阶等区域

LED: 1W / 2W
色温: 2700K / 3000K / 4000K
颜色: 氧化雾银
防护等级: IP65
开孔尺寸: D55 (嵌入安装)

输入电压: 24VDC, 自带配线长度1米
光面方式: 1-10V


3年有限整灯品质保证

Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01
Cut out size: D60mm
开孔尺寸: D60mm



Unit: mm

IP68 junction box 防水接线盒



JB1001
For single fixture installation
单灯安装

Optional finish 可选颜色




VH
Powder Coated White
粉末白



MB
Matt Black
氧化雾黑




STEP LIGHT 阶梯灯



BE-STL0105A

Unit: mm



BE-STL0105B

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0105A	1W	24VDC	3000K	100lm	1m	D40	50
BE-STL0105B	1W	24VDC	3000K	100lm	1m	D40	50

Features 产品特点

Aluminium Dimmable Step Light
For outdoor step / decking / marker

LED: 1W
Color Temperature: 2700K / 3000K / 4000K
Finish: Matt Silver Anodized
IP rated: IP65
Cut out: D40 (for deck mounting)

24VDC input, with 1M of power cable
Dimmable support: 1-10V

3 year limited guarantee

铝制调光阶梯灯
适用于户外：楼梯、走道、台阶等区域

LED: 1W
色温：2700K / 3000K / 4000K
颜色：哑化雾银
防护等级：IP65
开孔尺寸：D40 (嵌入安装)

输入电压：24VDC，自带配线长度1米
光调方式：1-10V

3年有限整灯品质保证

Patent 专利 #：ZL 2015 2 0276208.6


Optical Accessories 可选配件

Mounting sleeve 预埋件



STAS01

Cut out size: D41mm
开孔尺寸：D41mm



Unit: mm

IP68 junction box 防水接线盒



JB1001

For single fixture installation
单灯安装

Optional finish 可选颜色




WH
Powder Coated White
喷粉白




MB
Matt Black
氧化雾黑



STEP LIGHT 阶梯灯



BE-STL0301A



BE-STL0501B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Cable Length 电线长度	Cut out 开孔尺寸	Recess 安装深度
BE-STL0301A	3W	12/24V	3000K	250lm	1m	D51	100
BE-STL0301B	3W	12/24V	3000K	250lm	1m	D51	100
BE-STL0501A	5W	12/24V	3000K	550lm	1m	D51	100
BE-STL0501B	5W	12/24V	3000K	550lm	1m	D51	100

Features 产品特点

Aluminium Step Light
For outdoor step / decking / marker

铝制阶梯灯
适用于户外：楼梯、走道、台阶等区域

LED: 3W / 5W

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Silver Anodized

IP rated: IP67

Cut out: D51 (for deck mounting)

LED: 3W / 5W

色温: 2700K / 3000K / 4000K

颜色: 雾化雾银

防护等级: IP67

开孔尺寸: D51 (嵌入安装)

12/24VDC input, built-in DC driver with 2M of power cable
(5W: Input wattage must be 3 times higher than the rated LED wattage to insure LED start-up)

输入电压: 12 / 24VDC; 内置DC-DC驱动, 自带配线长度2米
(注: 因5W内置驱动启动电流要求较高, 请保证电源功率高于灯具功率4倍)

3 year limited guarantee

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

95 www.becostar.com


Optical Accessories 可选配件

Mounting sleeve 预埋件



WUAS01

Cut out size: D60mm
开孔尺寸: D60mm



Unit: mm


Anti-glare glass lens 光学配件



WUAG01F
Frosted glass lens
磨砂玻璃



WUAG01W
Silk-screen glass lens
丝网玻璃



Unit: mm

IP68 junction box 防水接线盒



JB2001

For single fixture installation
单灯安装



JB3001

For continuous fixtures installation
连续安装

Optional style 可选款式



BE-STL0301C/0501C



BE-STL0301E/0501E



BE-STL0301D/0501 D



BE-STL0301F/0501 F



Optional finish 可选颜色




MB
Matt Black
雾化雾黑


STEP LIGHT 阶梯灯



BE-STM0301A
BE-STM0301C




BE-STM0301B
BE-STM0301D




Item number 产品型号	Watts 功率	Input Current 输入电流	CCT 色温	LED Lumens 光通量	IP Rate 防护等级	Cut out 开孔尺寸	Recess 安装深度
BE-STM0301A/B	3W	220-240VAC	3000K	250lm	IP55	64x122	60
BE-STM0301C/D	3W	220-240VAC	3000K	250lm	IP20	64x122	60



BE-STM0401A



BE-STM0401B



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	IP Rate 防护等级
BE-STM0401A	4W	220-240VAC	3000K	450lm	IP55
BE-STM0401B	4W	220-240VAC	3000K	450lm	IP55



Features 产品特点

Main Voltage Aluminium Step Light
For outdoor step / decking / marker

LED: 3W
Beam Angle: Asymmetric
Color Temperature: 2700K / 3000K / 4000K
Finish: Powder Coated Black
IP rated: STM0301A / B (IP55)
STM0301C / D (IP20, with PIR)
Cut out: 64x122x60
65x144x60 (with mounting sleeve)

220-240VAC input, built-in driver with 0.2M of power cable
3 year limited guarantee

高压铝制阶梯灯
适用于户外：楼梯、走道、台阶等区域

LED: 3W
光束角：偏光
色温：2700K / 3000K / 4000K
颜色：喷粉黑
防护等级：STM0301A / B (IP55);
STM0301C / D (IP20, 带红外感应)
开孔尺寸：64x122x60
65x144x60 (带预埋件)

输入电压：220-240VAC; 内置驱动 - 自带配线
长度0.2米
3年有限整灯品质保证

Features 产品特点

Main Voltage Aluminium Step Light
For outdoor step / decking / marker

LED: 4W
Beam Angle: Asymmetric
Color Temperature: 2700K / 3000K / 4000K
Finish: Powder Coated Black
IP rated: IP55
Mounting type: Surface mounting
220-240VAC input, built-in driver

3 year limited guarantee

高压铝制阶梯灯
适用于户外：楼梯、走道、台阶等区域

LED: 4W
光束角：偏光
色温：2700K / 3000K / 4000K
颜色：喷粉黑
防护等级：IP55
安装方式：表面安装
输入电压：220-240VAC; 内置驱动
3年有限整灯品质保证