

Wall light

**BECOSTAR**  
LIGHTING

WALL  
LIGHT

VI

壁 灯

LIGHTING ARTISAN


## WALL LIGHT 壁灯




WLM0501A



WLM0901A

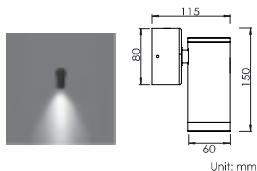

Unit: mm

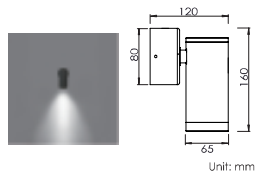

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
WLM0501A	5W	220-240VAC	3000K	550lm	25°
WLM0901A	9W	220-240VAC	3000K	1050lm	24°

## Features 产品特点

### Aluminium Wall Light

For outdoor / indoor / spot / wall

LED: 5W / 9W

Beam Angle: 5W (15° / 25° / 38° / 60°); 9W (15° / 24° / 38° / 60°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP65

Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

### 铝制壁灯

适用于走道、外墙、廊柱等区域

LED: 5W / 9W

光束角: 5W (15° / 25° / 38° / 60°); 9W (15° / 24° / 38° / 60°)

色温: 2700K / 3000K / 4000K

颜色: 氧化雾黑

防护等级: IP65


安装方式: 表面安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

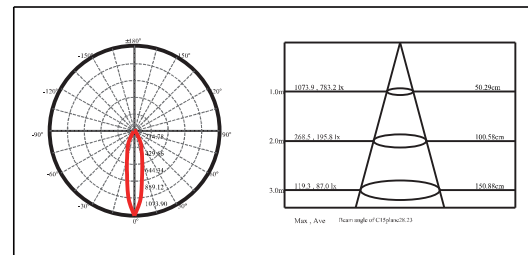

## Optical Accessories 可选配件

### Anti-glare glass lens 光学配件




WUAG02L(for 5W)  
DLAG01L(for 9W)  
Linear glass lens  
横纹玻璃



WUAG02S(for 5W)  
DLAG01S(for 9W)  
Soft glass lens  
布纹玻璃

Ø44 (for 5W)  
Ø50 (for 9W)



Unit: mm




WUAH02(for 5W)  
DLAH01(for 9W)  
Honeycomb louver  
蜂巢网片



## WALL LIGHT 壁灯




WLM0502  
WLM0802



Unit: mm




WLM1502  
WLM2002



Unit: mm




WLM0503  
WLM0803



Unit: mm




WLM1503  
WLM2003



Unit: mm



WLM0504  
WLM0804



Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
WLM0502A	5W	220-240VAC	3000K	550lm	36°
WLM0502D	2x5W	220-240VAC	3000K	2x550lm	36°
WLM0802A	8W	220-240VAC	3000K	950lm	36°
WLM0802D	2x8W	220-240VAC	3000K	2x950lm	36°
WLM1502A	15W	220-240VAC	3000K	1650lm	36°
WLM1502D	2x15W	220-240VAC	3000K	2x1650lm	36°
WLM2002A	20W	220-240VAC	3000K	2250lm	36°
WLM2002D	2x20W	220-240VAC	3000K	2x2250lm	36°

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
WLM0503A	5W	220-240VAC	3000K	550lm	36°
WLM0503D	2x5W	220-240VAC	3000K	2x550lm	36°
WLM0803A	8W	220-240VAC	3000K	950lm	36°
WLM0803D	2x8W	220-240VAC	3000K	2x950lm	36°
WLM1503A	15W	220-240VAC	3000K	1650lm	36°
WLM1503D	2x15W	220-240VAC	3000K	2x1650lm	36°
WLM2003A	20W	220-240VAC	3000K	2250lm	36°
WLM2003D	2x20W	220-240VAC	3000K	2x2250lm	36°
WLM0504A	5W	220-240VAC	3000K	550lm	36°
WLM0504D	2x5W	220-240VAC	3000K	2x550lm	36°
WLM0804A	8W	220-240VAC	3000K	950lm	36°
WLM0804D	2x8W	220-240VAC	3000K	2x950lm	36°

### Features 产品特点

#### Aluminium Wall Light

For outdoor / indoor / spot / wall

LED: 5W / 8W / 15W / 20W  
Beam Angle: 12° / 24° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

#### 铝制壁灯

适用于走廊、外墙、廊柱等区域

LED: 5W / 8W / 15W / 20W  
光束角: 12° / 24° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 喷粉黑  
防护等级: IP65  
安装方式: 表面安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

### Features 产品特点

#### Aluminium Wall Light

For outdoor / indoor / spot / wall

LED: 5W / 8W / 15W / 20W  
Beam Angle: 12° / 24° / 36° / 60°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Powder Coated Black  
IP rated: IP65  
Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

#### 铝制壁灯

适用于走廊、外墙、廊柱等区域


LED: 5W / 8W / 15W / 20W  
光束角: 12° / 24° / 36° / 60°  
色温: 2700K / 3000K / 4000K  
颜色: 喷粉黑  
防护等级: IP65  
安装方式: 表面安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证



Down light

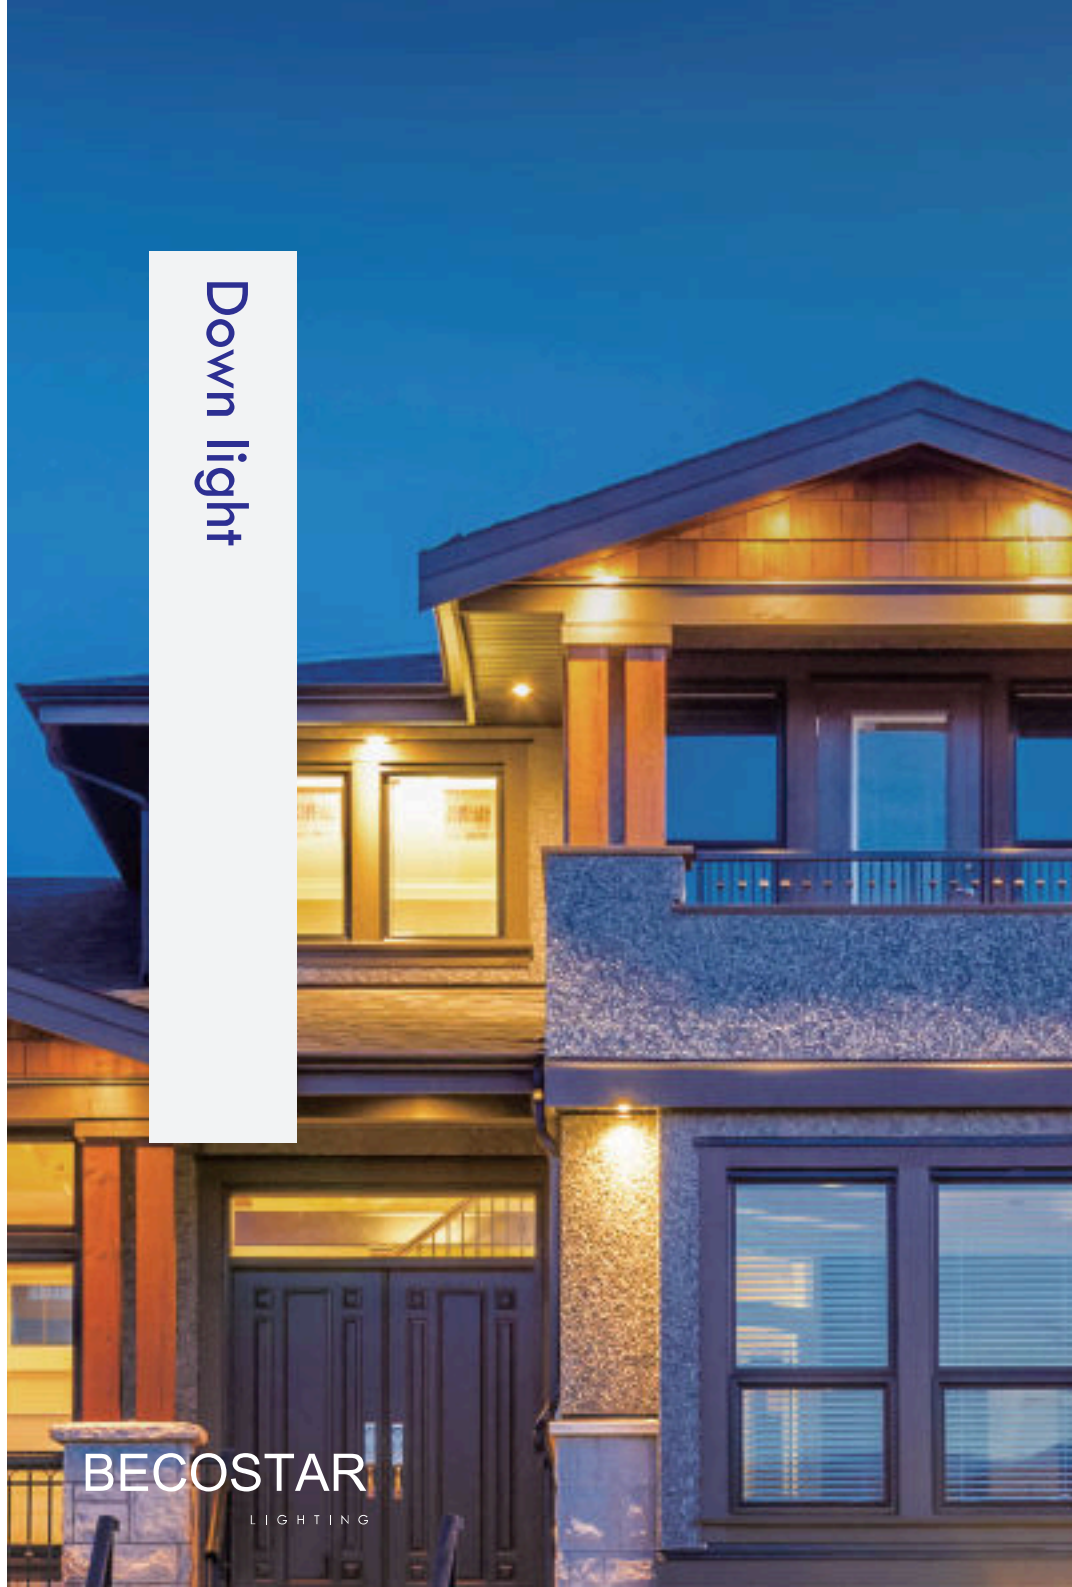

**BECOSTAR**  
LIGHTING

DOWN  
LIGHT




筒 灯

LIGHTING ARTISAN


## DOWN LIGHT 筒灯



BE-DLL0901



BE-DLL1501



Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLL0901	9W	12/24V	3000K	1050lm	38°
BE-DLL1501	15W	24V	3000K	2000lm	36°

## Features 产品特点

### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 9W / 15W

Reduced Glare: Sunken light source

Beam Angle: 9W (20° / 38°); 15W (16° / 24° / 36°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP65

Mounting Type: Surface mounting

9W 12/24VDC, 15W 24VDC input, built-in DC driver  
(Input wattage must be 2 times higher than the rated LED wattage to insure LED start-up)

3 year limited guarantee

### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 9W / 15W

光束角：9W (20° / 38°); 15W (16° / 24° / 36°)

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP65

安装方式：吸顶安装


输入电压：9W：12 / 24VDC; 15W：24VDC; 内置DC-DC驱动

(注：因内置驱动启动电流要求较高，请保证电源功率高于灯具功率3倍)

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

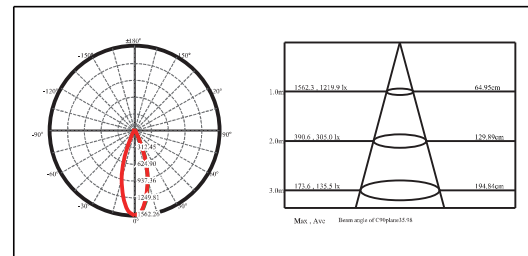

## Optical Accessories 可选配件

### Anti-glare glass lens 光学配件




DLAG01L(for 9W)  
DLAG02L(for 15W)  
Linear glass lens  
横纹玻璃



DLAG01S(for 9W)  
DLAG02S(for 15W)  
Soften glass lens  
布纹玻璃

Ø50 (for 9W)  
Ø69 (for 15W)




Unit: mm




DLAH01(for 9W)  
DLAH02(for 15W)  
Honeycomb louver  
蜂巢网片




## DOWN LIGHT 筒灯



BE-DLM0501



BE-DLM0901



BE-DLM1501

Unit: mm

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM0501	5W	220-240VAC	3000K	550lm	36°
BE-DLM0901	9W	220-240VAC	3000K	1050lm	38°
BE-DLM1501	15W	220-240VAC	3000K	2000lm	36°

## Features 产品特点

### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 5W / 9W / 15W

Reduced Glare: Sunken light source

Beam Angle: 5W / 15W (16° / 24° / 36°)  
9W (15° / 24° / 38° / 60°)

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP65

Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 5W / 9W / 15W

光束角: 5W / 15W (16° / 24° / 36°);  
9W (15° / 24° / 38° / 60°)

色温: 2700K / 3000K / 4000K

颜色: 氧化雾黑

防护等级: IP65


安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

Patent 专利 #: ZL 2015 2 0276208.6

## Optical Specification 配光曲线

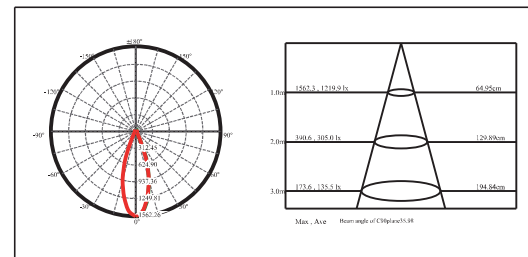

## Optical Accessories 可选配件

### Anti-glare glass lens 光学配件




DLAG01L(for 9W)  
DLAG02L(for 5W/15W)  
Linear glass lens  
横纹玻璃



DLAG01S(for 9W)  
DLAG02S(for 5W/15W)  
Soft glass lens  
布纹玻璃

Ø50 (for 9W)  
Ø69 (for 5W/15W)




Unit: mm



DLAH01(for 9W)  
DLAH02(for 5W/15W)  
Honeycomb louver  
蜂巢网片



## PENDANT LIGHT 吊线灯

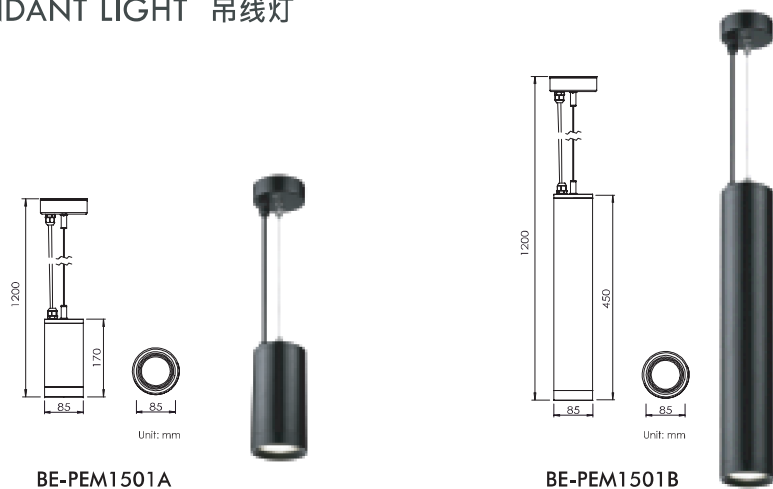

BE-PEM1501A

BE-PEM1501B

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-PEM1501A	15W	220-240VAC	3000K	2000lm	36°
BE-PEM1501B	15W	220-240VAC	3000K	2000lm	36°

## Features 产品特点

**Aluminium Pendant Light**  
For outdoor ceiling / hallway / eaves

LED: 15W  
Reduced Glare: Sunken light source  
Beam Angle: 16° / 24° / 36°  
Color Temperature: 2700K / 3000K / 4000K  
Finish: Matt Black Anodized  
IP rated: IP65  
Mounting Type: Pendant

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6


**铝制吊线灯**  
适用于户外：走廊、屋檐、露台等区域

LED: 15W  
光束角: 16° / 24° / 36°  
色温: 2700K / 3000K / 4000K  
颜色: 氧化雾黑  
防护等级: IP65  
安装方式: 吸顶安装

输入电压: 220-240VAC; 内置驱动

3年有限整灯品质保证

## Optical Specification 配光曲线

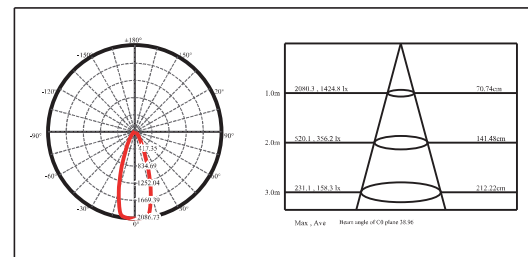

## Optical Accessories 可选配件


### Anti-glare glass lens 光学配件



DLA02L  
Linear glass lens  
横纹玻璃



DLA02S  
Soften glass lens  
布纹玻璃




Unit: mm




DLA02  
Honeycomb louver  
蜂巢网片

## DOWN LIGHT 筒灯



BE-DLM0702/BE-DLM0902

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM0702	7W	220-240VAC	3000K	750lm	36°
BE-DLM0902	9W	220-240VAC	3000K	1050lm	36°



BE-DLM1502/BE-DLM2002

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM1502	15W	220-240VAC	3000K	1650lm	36°
BE-DLM2002	20W	220-240VAC	3000K	2250lm	36°

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 7W / 9W

Reduced Glare: Sunken light source

Beam Angle: 16° / 24° / 36°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP65

Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 7W / 9W

光束角：16° / 24° / 36°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP65

安装方式：吸顶安装

输入电压：220-240VAC；内置驱动

3年有限整灯品质保证

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 15W / 20W

Reduced Glare: Sunken light source

Beam Angle: 16° / 24° / 36°

Color Temperature: 2700K / 3000K / 4000K

Finish: Matt Black Anodized

IP rated: IP65

Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 15W / 20W

光束角：16° / 24° / 36°

色温：2700K / 3000K / 4000K

颜色：氧化雾黑

防护等级：IP65

安装方式：吸顶安装


输入电压：220-240VAC；内置驱动

3年有限整灯品质保证






## DOWN LIGHT 筒灯



BE-DLM2502/BE-DLM3002

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM2502	25W	220-240VAC	3000K	3000lm	36°
BE-DLM3002	30W	220-240VAC	3000K	3600lm	36°



BE-DLM4002/BE-DLM4502

Item number 产品型号	Watts 功率	Input Volt 输入电压	CCT 色温	LED Lumens 光通量	Beam Angle 光束角
BE-DLM4002	40W	220-240VAC	3000K	4800lm	36°
BE-DLM4502	45W	220-240VAC	3000K	5500lm	36°

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 25W / 30W  
 Reduced Glare: Sunken light source  
 Beam Angle: 16° / 24° / 36°  
 Color Temperature: 2700K / 3000K / 4000K  
 Finish: Matt Black Anodized  
 IP rated: IP65  
 Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 25W / 30W  
 光束角：16° / 24° / 36°  
 色温：2700K / 3000K / 4000K  
 颜色：氧化雾黑  
 防护等级：IP65  
 安装方式：吸顶安装

输入电压：220-240VAC；内置驱动

3年有限整灯品质保证

### Features 产品特点

#### Aluminium Down Light

For outdoor ceiling / hallway / eaves

LED: 40W / 45W  
 Reduced Glare: Sunken light source  
 Beam Angle: 16° / 24° / 36°  
 Color Temperature: 2700K / 3000K / 4000K  
 Finish: Matt Black Anodized  
 IP rated: IP65  
 Mounting Type: Surface mounting

220-240VAC input, supplied with driver

3 year limited guarantee

Patent 专利 #: ZL 2015 2 0276208.6

#### 铝制筒灯

适用于户外：走廊、屋檐、露台等区域

LED: 40W / 45W  
 光束角：16° / 24° / 36°  
 色温：2700K / 3000K / 4000K  
 颜色：氧化雾黑  
 防护等级：IP65  
 安装方式：吸顶安装

输入电压：220-240VAC；内置驱动

3年有限整灯品质保证

